



125W Ext. 5.85-6.725 GHz C-Band BUC

KEY FEATURES


- ◆ Output frequency 5.850-6.725 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability.
- ◆ L.O. 4.9 GHz
- ◆ Incomparable low power consumption (468W max)
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver. 3) and optional FSK
- ◆ Auto-ranging AC 85 - 245 VAC powering option
- ◆ Digital temperature compensation
- ◆ Power and lock status LED
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability reference (optional)
- ◆ RoHS compliant

ABD125DC / ABD125DCF



This smallest and lightest 125W L-To C-Band Block Up Converter is based on GaN technology. It is designed to be mounted on the feed horn. The unit covers C-Band sub-bands: Standard (5.850-6.425 GHz) and Palapa (6.365-6.725 GHz).

Mechanical Drawing

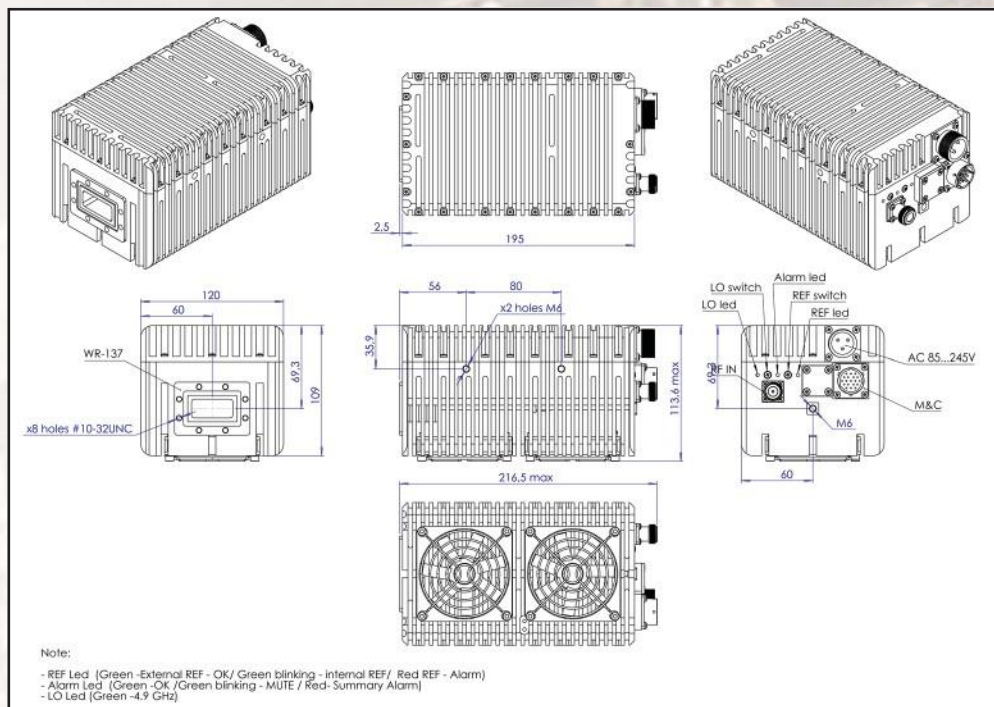



125W Ext. 5.85-6.725 GHz C-Band BUC

TECHNICAL SPECIFICATIONS		
RF frequency	5.850 to 6.725 GHz	
Local oscillator	4.90 GHz	
IF frequency	950 to 1,825 MHz	
Output power	125W (+51 dBm min.), P-Linear 67.3W (+48.3 dBm min.)	
IF connector	N-type or F-type (field-exchangeable)	
Power supply : auto-ranging via MS connector	+85 ~ +245 VAC, 468W max.	
Output interface	CPR-137 G	
Gain	74 dB nominal	
IMD3 (two tones)	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR	
L.O. leakage	-45 dBm max	
Spurious	-50 dBc max	
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc	
Requirement for external reference: frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port	
TX Gain variation	± 0.5 dB over 40 MHz ± 1.8 dB over full band	
TX Gain stability over temperature range	± 1.5 dB typ., ± 1.8 dB max.	
Phase noise (Exceeds Intelsat's standard IESS308/309)	-55 dBc/Hz max. @ 10 Hz -65 dBc/Hz max. @ 100 Hz -75 dBc/Hz max. @ 1 KHz -85 dBc/Hz max. @ 10 KHz -95 dBc/Hz max @ 100 KHz -115 dBc/Hz max @ 1 MHz	
Noise power density	Transmit	-66 dBm/Hz (max)
	Receive	-157 dBm/Hz (max)
FSK	Multiplexed on TX IFL, compatible with Compech and Paradigm	
M&C Interface	RS-232, RS-485 and Ethernet (HTTP and SNMP ver.3)	
Noise figure	15 dB max	
Input V.S.W.R.	1.5 : 1 max	
Output V.S.W.R.	1.5 : 1 max.	
Mute	Shut off the HPA if L.O. unlocked	
Status LED	External Reference - OK Internal Reference - OK Reference - Alarm OK Mute Summary Alarm 4.9GHz	
10MHz Reference LED		
Alarm LED		
L.O. LED		
Temperature range (ambient)		
operating	-40 deg C to +55 deg C	
storage	-55 deg C to +85 deg C	
Vibration and shock	Complies with MIL-STD-810E	
Altitude	Up to 23,000 feet	
Dimensions & housing	195 (L) x 120 (W) x 113.6 (H) mm 7.67" (L) x 4.72" (W) x 4.47" (H)	
Weight	3.36 kg (7.40 lbs) max	