



60W Ext. C-Band 5.85-6.725 GHz Block Up Converter

KEY FEATURES


- ◆ 5.85 GHz - 6.725 GHz output frequency
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability.
- ◆ Incomparable low power consumption (240W max)
- ◆ Auto-ranging powering option 80-240 VAC
- ◆ High power efficiency (60W min over temperature)
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Power and lock status LED
- ◆ Advanced M&C RS-232/485, Ethernet (HTTP and SNMP ver.2 and 3) and optional FSK
- ◆ Internal 10MHz high stability reference (optional)
- ◆ RoHS compliant

ABD60DC / ABD60DCF



This smallest and lightest 60W(min) L-To C-Band Block Up Converter is based on GaN technology. It could be mounted directly on a feed horn. The unit covers Standard and Palapa C-Band frequencies: 5.85-6.725 GHz.

Mechanical Drawing

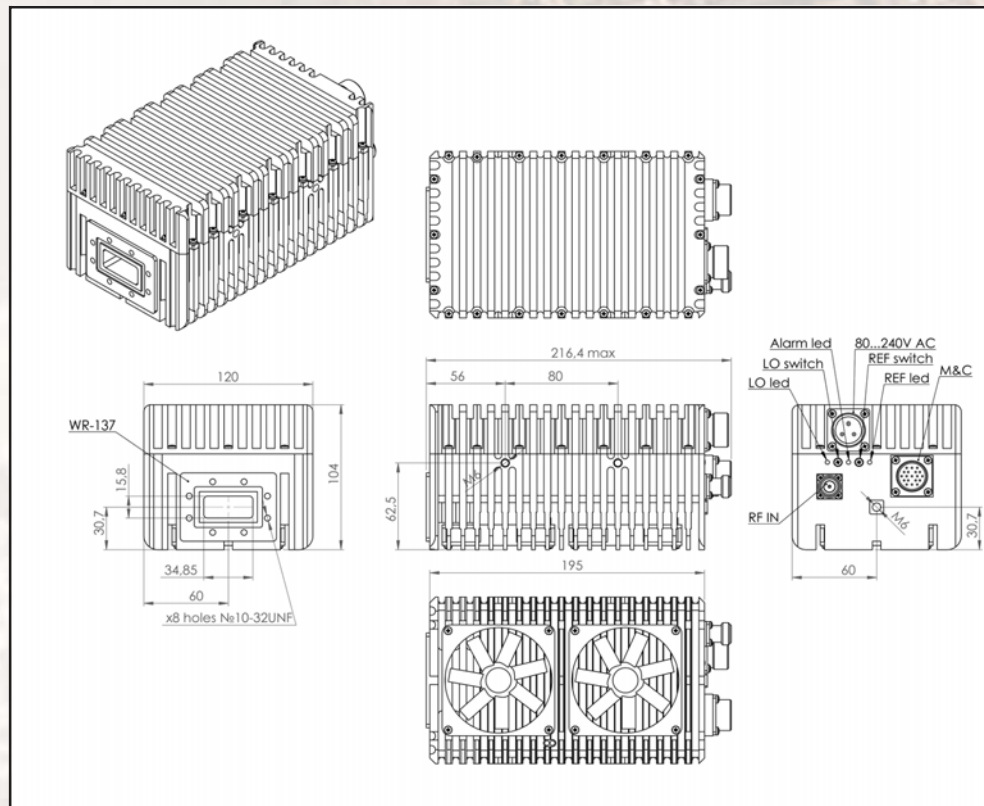



60W Ext. C-Band 5.85-6.725 GHz Block Up Converter

TECHNICAL SPECIFICATIONS		
RF frequency		5.850 to 6.725 GHz
Local oscillator		4.90 GHz
IF frequency		950 to 1,825 MHz
Output power	@ MIN @ PLINEAR	60W typ. (+48 dBm min.) 30.4W (+44.8 dBm min.)
IF connector		N-type or F-type (field-exchangeable)
Power supply : auto-ranging via MS connector		80-240 VAC, 240 W max
Output interface		CPR 137 G
Gain		70 dB nominal
IMD3 (two tones)		-26 dBc max. 2 signal 5MHz apart at P-LINEAR
L.O. leakage		-45 dBm max
Spurious		-50 dBc max
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference:		via IF cable
frequency		10 MHz (sine-wave)
input power		-5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40MHz ± 1.8 dB over full band
TX Gain stability over temperature range		± 1.5 dB typ., ± 1.8 dB max.
Phase noise		-55 dBc/Hz max. @ 10 Hz
(Exceeds Intelsat's standard IESS308/309)		-65 dBc/Hz max. @ 100 Hz
		-75 dBc/Hz max. @ 1 KHz
		-85 dBc/Hz max. @ 10 KHz
		-95 dBc/Hz max @ 100 KHz
Noise power density	Transmit Receive	-66 dBm/Hz (max) -157 dBm/Hz (max)
M&C Interface		RS-232 and RS-485 and Ethernet (HTTP and SNMP ver.2 and 3)
FSK		Multiplexed on TX IFL, com. with Comtech/ Paradigm
Noise figure		15 dB max
Input V.S.W.R.		1.5 : 1 max
Output V.S.W.R.		1.5 : 1 max.
Mute		Shut off the HPA if L.O. unlocked
Status LED	RED GREEN YELLOW	Summary alarm All OK All OK standard L.O. 4.90 GHz
Temperature range (ambient)		
operating		-40 deg C to +55 deg C
storage		-55 deg C to +85 deg C
Altitude		Up to 23,000 feet
Vibration and shock		Complies with MIL-STD-810E
Dimensions & housing		195 (L) x 120 (W) x 104 (H) mm 7.67"(L) x 4.72"(W) x 4.09" (H)
Weight		2.96 kg (6.5 lbs) max