

KEY FEATURES

5.850 GHz - 6.725 GHz output frequency

Based on GaN technology which enables high efficiency, low power consumption and high reliability.

Incomparable low power consumption (184W max)

Auto-ranging powering option 18-75 VDC

High power efficiency (SOW min over temperature)

Digital temperature compensation

Field-exchangeable (F/N) IF connector

Power and lock status LED

Advanced M&C RS-232/485, FSK (optional), Ethernet (optional)

Internal 10MHz high stability 10⁻⁶ reference (optional)

RoHS compliant


Three-year warranty

ABESODC/ABE50DCF



This smallest and lightest 50W(min) L-To C-Band Block Up Converter is based on GaN technology. It could be mounted directly on a feed horn. The unit covers Standard and Palapa C-Band frequencies: 5.850-6.725 GHz.

Mechanical Drawing

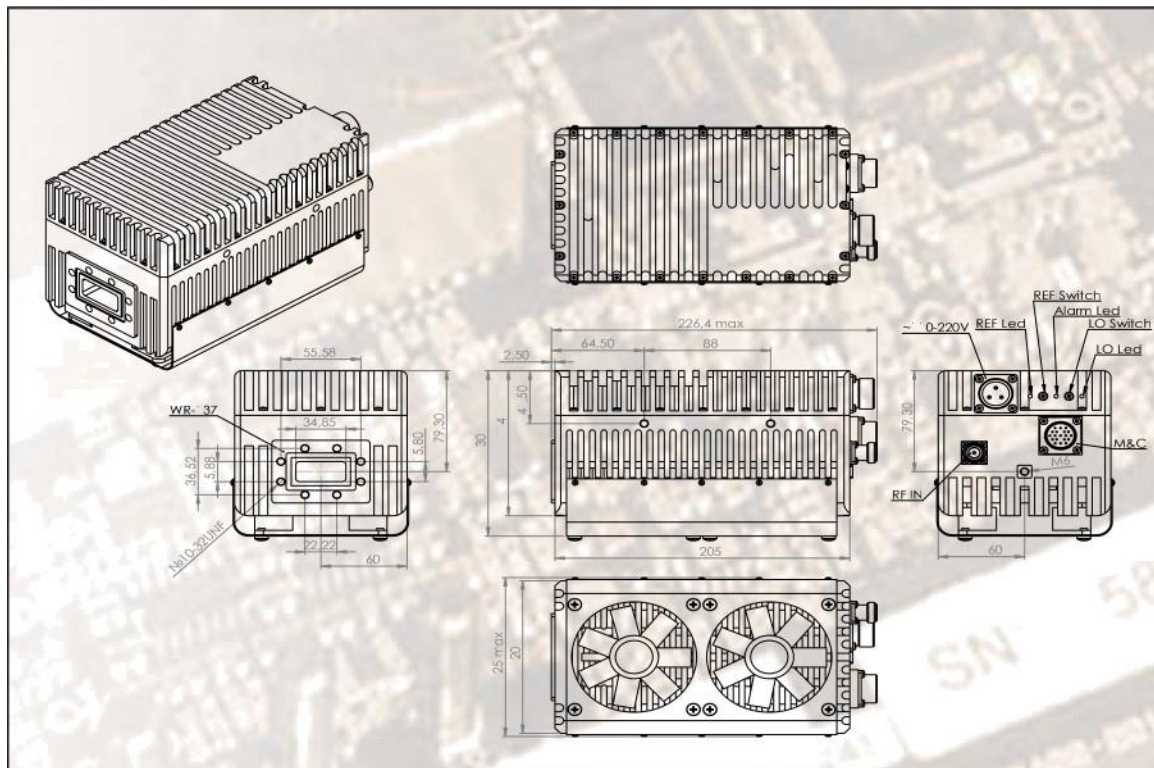

GaN Based Product



SOW Ext. C-Band 5.85-6.725 GHz Block Up Converter

TECHNICAL SPECIFICATIONS		
RF frequency		5.850 to 6.725 GHz
Local oscillator		4.90 GHz
IF frequency		950 to 1,850 MHz
Output power	@ MIN. @ PLINEAR	SOW typ. (+47 dBm min.) 25.1W (+44 dBm min.)
IF connector		N-type or F-type (field-exchangeable)
Power supply : auto-rang ing	via IF connector	18-75 VDC, 184 W max
Output interface		CPR 137 G
Internal 10MHz high stability reference		10
Gain		68 dB nominal
IMD3 (two tones)		-26 dBc max. 2 signal 5MHz apart at P-LINEAR
L.O. leakage		-45 dBm max
Spurious		-50 dBc max
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference:	frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation		+ 0.5 dB over 40MHz + 1.8 dB over full band + 1.5 dB typ., + 1.8 dB max.
TX Gain stability over temperature range		
Phase noise (Exceeds Intelsat's standard IESS308/309)		-55 dBc/Hz max. @ 10 Hz -65 dBc/Hz max. @ 100 Hz -75 dBc/Hz max. @ 1 KHz -85 dBc/Hz max. @ 10 KHz -95 dBc/Hz max @ 100 KHz
Noise power density	Transmit Receive	-66 dBm/Hz (max) -157 dBm/Hz (max)
M&C Interface		RS-232 and RS-485, Ethernet
FSK		Multiplexed on TX IFL, com. with Comtech/ Paradigm
Noise figure		15 dB max
Input V.S.W.R.		2 : 1 max
Output V.S.W.R.		2 : 1 max.
Mute		Shut off the HPA if L.O. unlocked
Status LED	RED GREEN YELLOW	Summary alarm All OK All OK standard L.O. 4.90 GHz
Temperature range (ambient) operating storage		-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock		Complies with MIL-STD-810E
Dimensions & housing		205 (L) x 120 (W) x 130 (H) mm 8.07"(L) x 4.72"(W) x 5.12" (H)
Weight		3.08 kg (6.8 lbs) max