Ku-Band Filter

KEY FEATURES

AF1071275S




- Pass band: 10.7-12.75 GHz
- Insertion loss: 0.1 dB max.
- Rejection band: 13.75-14.5 GHz
- Rejection: 80 dB min.
- Flanges: PBR 75 & UBR 75

Specifications

Pass band	10.7-12.75 GHz
Insertion loss	0.1 dB max.
VSWR	1.20:1
Rejection band	13.75-14.5 GHz
Rejection	80 dB min.
Flanges	PBR 75 & UBR 75
Operating temperature	-55 deg. C to +70 deg. C
Finish	Gloss white
Dimensions & housing	115 (L) x 38 (W) x 38 (H) mm.
	4.5” (L) x 1.5” (W) x 1.5” (H)
Weight	368 g.

Mechanical Drawing

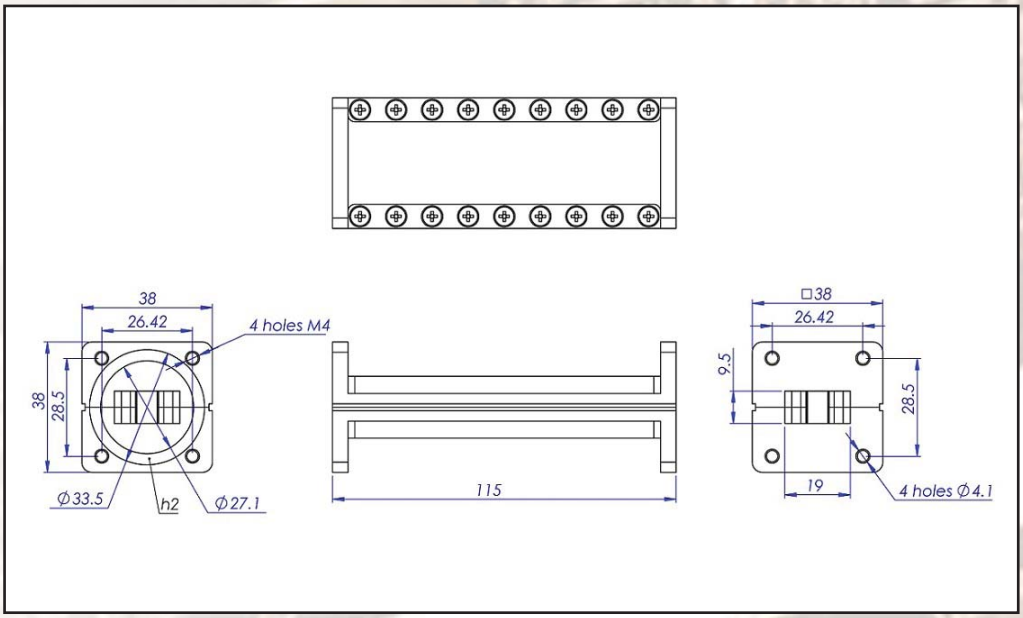

Actox Corporation ***Phone/Fax: 866-888-6087*** *www.actox.com* *sales@actox.com*