




APS15024I

-

Mechanical Drawing

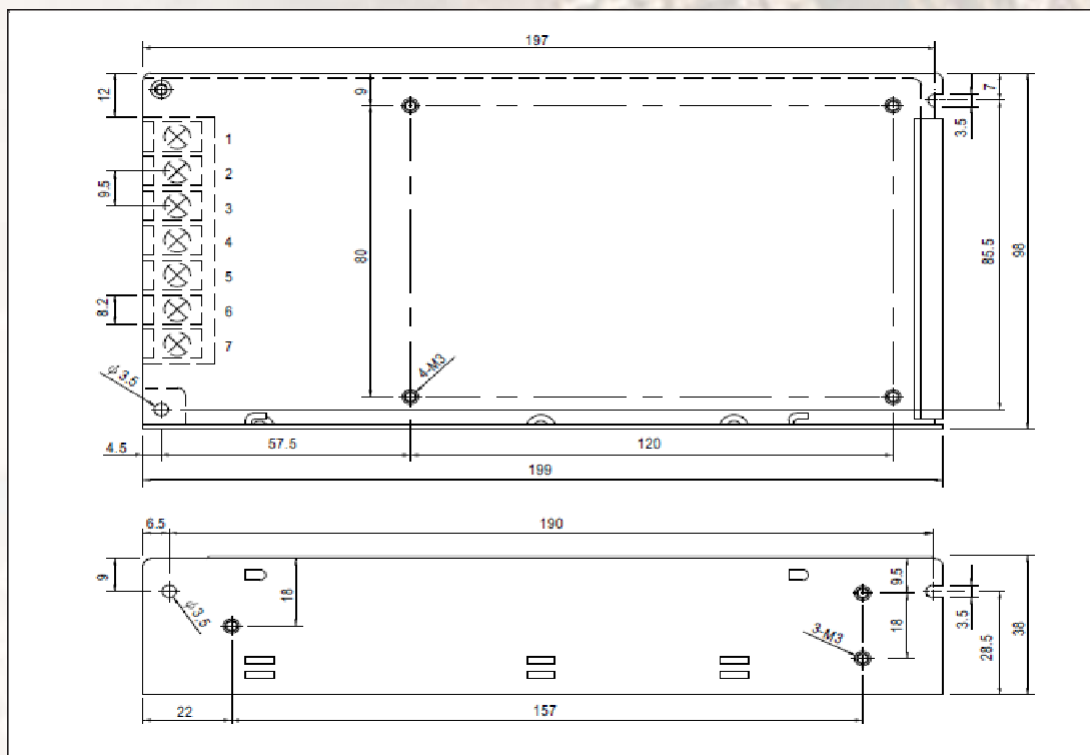



150W 24VDC Indoor Power Supply


TECHNICAL SPECIFICATIONS

Output DC Voltage	24V
Output Rated Current	6.5A
Output Current Range	0 ~ 6.5A
Output Rated Power	156W
Output Ripple and Noise (max.)	120mVp-p
Output Voltage Adj. Range	22.8 - 26.4V
Output Setup, Reset Time	800ms, 20ms/230VAC 1200ms, 30ms/115VAC full load
Input Voltage Range	88 ~132 VAC 248 ~ 373VDC (withstand 300VAC surge for 5 sec. w/out damage)
Efficiency (typ.)	86%
Input AC Current (typ.)	3A/115VAC 2A/230VAC
Over Load Protection	110-150% rated output power
Working Temp.	-25 ~ +70°C
Storage Temp.	-40 ~ +85°C
Working Humidity	20 ~ 90% RH non-condensing
Dimensions & housing	199x98x38mm
Weight	0.7kg

TERMINAL PIN ASSIGNMENT

Pin #	Assignment
1	AC-Line
2	AC-Neutral
3	Ground
4 and 5	DC OUTPUT-V
6 and 7	Dc OUTPUT+V

Output Derating

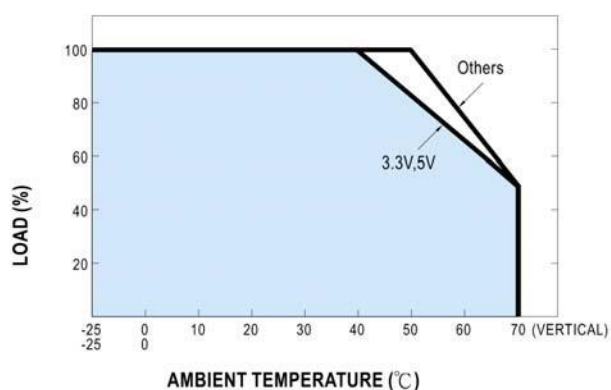

Static Characteristics

