

## SA-MOD-1-9-A-2S

## Embedded L-Band Dual Input Spectrum Analyzer Module



- Software-Defined-Radio
- Compact, Rugged Design
- Monitoring & Control (M&C) via Ethernet
- Integrates with Avcom's EVO-GUI or Comprehensive API
- Extended Temperature Range
- Low SWaP (Size, Weight, and Power)

The SA-MOD-1 spectrum analyzer is based on Avcom's software-defined-radio technology platform designed to exceed today's performance challenges. The analyzer is intended for embedded applications required to operate under challenging conditions.


Avcom's newest analyzer technology provides excellent performance by employing high-performance DSP, and FPGAs. Integrators can now embed a full-function spectrum analyzer in a very small volume into systems operating in austere and rugged environments.

Communication with the module is achieved via ethernet and Avcom's Graphical User Interface, the EVO GUI software. It provides a feature-rich set of functions to control, monitor & alarm, while recording and datalogging. The system can also be accessed via a POSIX-Compliant API, available from Avcom.

### Versatile Remote-Control Software

The SA-MOD-1-9 can provide discrete remote monitoring and control from anywhere in the world. The SA-MOD-1-9 is monitored and controlled using the Avcom Remote Control Software EVO-GUI via USB, or Ethernet. The EVOGUI has an intuitive user interface that is easy to use with no special training required. Up to sixteen windows can be displayed at one time. The Avcom GUI will run on the WINDOWS OS. The GUI is preconfigured for actual remote analyzers we keep online so that you can try the software before purchasing.

"Following the Signal", and listening to our customers, this series is perfectly suited to provide functionality in earth stations, teleports, and RF signal monitoring environments. The MOD Series of analyzers is an excellent addition to the Avcom family of products for demanding applications which require the extended performance characteristics, while still providing a low cost-of-ownership and a highly cost-effective and reliable product.

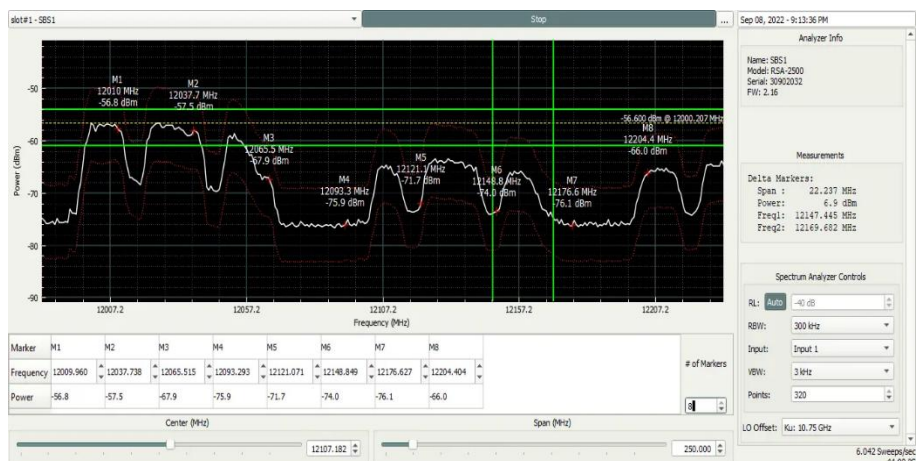


## SA-MOD-1-9-A-2S - TECHNICAL SPECIFICATIONS DATA

| PARAMETER                             | PERFORMANCE                                    |
|---------------------------------------|------------------------------------------------|
| FREQUENCY RANGE                       | 900 - 2200 MHz                                 |
| SPAN WIDTH                            | 1200 MHz                                       |
| RESOLUTION BANDWIDTH                  | 1kHz, 3kHz, 10kHz, 100kHz, 300kHz, 1MHz        |
| REFERENCE LEVELS                      | Selectable: -10dBm to -40dBm                   |
| SPURIOUS FREE DYNAMIC RANGE           | 50dB                                           |
| AMPLITUDE ACCURACY                    | ±1dB typical                                   |
| SCALE PER DIVISION                    | 10dB/div                                       |
| USABLE INPUT RANGE                    | -100dBm to -10dBm                              |
| FREQUENCY ACCURACY                    | ±1kHz typical                                  |
| MAXIMUM RF INPUT                      | 25VDC Max (DC blocked); -10dBm                 |
| INPUT IMPEDANCE                       | 50Ω                                            |
| RF INPUT CONNECTOR                    | 2 X SMA                                        |
| INTERFACE CONNECTORS                  | Ethernet: 6-pin Molex. USB. Power: 2-pin Molex |
| POWER SUPPLY REQUIREMENT              | 15-24 VDC; < 3W                                |
| PHYSICAL DIMENSIONS (BOARD; ENCLOSED) | 3" x 3.5" x 1.057"                             |
| HUMIDITY                              | 0 to 95%, non-condensing                       |
| TEMPERATURE RANGES; OPERATING/STORAGE | -40 to +70 °C / -40 to +85 °C                  |
| OPERATING ALTITUDE RANGE              | 40,000 ft; 12,000m                             |
| WEIGHT                                | 8 oz.; 200 g                                   |

## SA-MOD-1-9-A-2S - Technical Specification Continued

### PHYSICAL DIMENSIONS, CONNECTOR DESIGNATIONS AND USER DATA

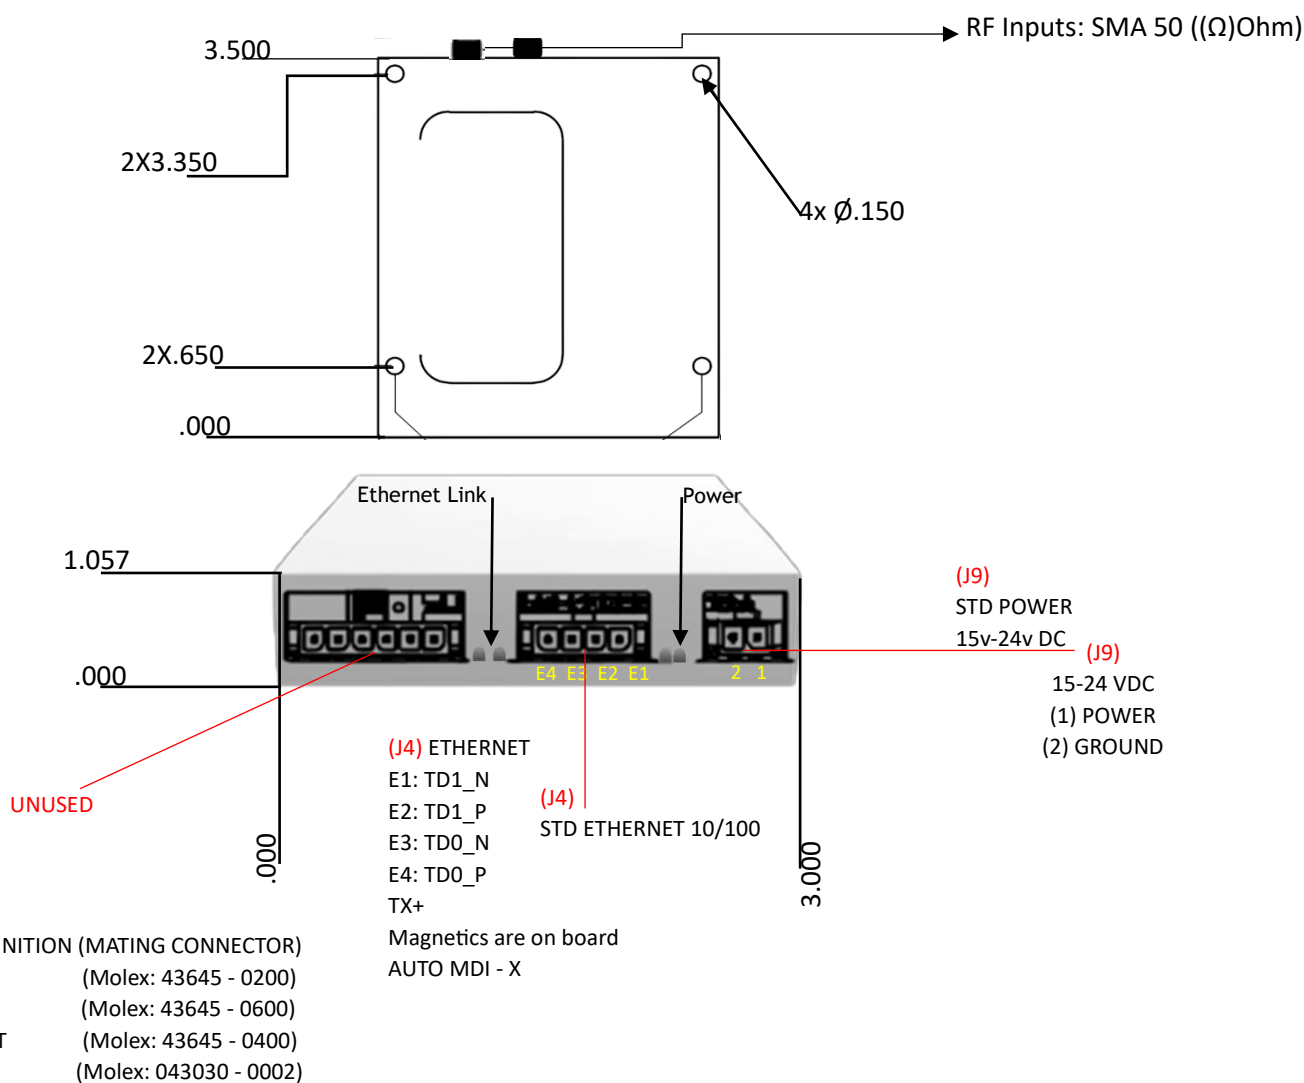

<https://www.avcomofva.com/evo-gui-software/>

©2024 Avcom of Virginia, Inc. 2024 - v.4.0

For ordering information email: salesrfq@avcomofva.com or call 804-794-2500