



Indoor Rack Mount GaAs Solid State Power Amplifiers 3RU Rack Height



3RU SSPA Chassis with Touchscreen Display

Teledyne Paradise Datacom's Indoor 3RU Solid State Power Amplifiers represent the latest in High Power Microwave Amplifier Technology. The SSPA chassis achieves the highest power density in the industry along with enhanced maintainability.

The power supply, fan trays and controller card connector plate are all removable for easy maintenance. At 25.25" deep, and only 3RU high, this chassis is perfect for SNG applications, or other configurations where rack space is at a premium.

The SSPA features a front panel color touchscreen display and five fault condition indicators that reflect some of the SSPA major fault states. Local/Remote and Mute/Unmute indicators show the current control mode and mute state of the amplifier.

Teledyne Paradise Datacom rack mount power amplifiers have a wide range of monitor and control functionality, including:

- RS-232/RS-485 (4-wire) serial communication
- Ethernet port supporting UDP, SNMP and web browser-based control
- Form C contacts for output monitor ports and opto-isolated input ports
- Free Windows M&C software
- Variety of third party M&C drivers available

FEATURES

- Extremely High Power Density:
 - to 300 W C-Band
 - to 200 W X-Band
 - to 125 W Ku-Band
- Removable Fan Tray and M&C Card Assembly
- Remote Communication via RS232/485 or Ethernet
- RF Output Sample Port
- 20 dB RF Gain Adjustment
- True RF Output Power Measurement
- 1RU N+1 Power Supply
- Color Touchscreen Display
- Built-in Maintenance Switch Controller

OPTIONS

- Removable RF Module
- L-Band Input operation
- Reflected Power Monitor
- Input Sample Port
- Exhaust Duct Adapters
- Remote Control Panel
- System Configurations



Indoor Rack Mount GaAs Solid State Power Amplifiers 3RU Rack Height

Specifications, C-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "L" Frequency selection "H" Frequency selection "C" ¹ Frequency selection "A" Frequency selection "B" ¹ Frequency selection "D"	4.400 to 5.000 5.715 to 5.790 5.750 to 6.670 5.850 to 6.425 5.850 to 6.725 6.425 to 7.025	GHz GHz GHz GHz GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{1dB}	HPAC3075ARXXXXP2 HPAC3100ARXXXXP2 HPAC3140ARXXXXP2 HPAC3200ARXXXXP2 HPAC3250ARXXXXP2 HPAC3300ARXXXXP2	P _{sat} / P _{1dB} 48.8 (76) / 48.5 (70) 50.0 (100) / 49.5 (89) 51.5 (150) / 51.0 (125) 53.0 (200) / 52.3 (170) 54.0 (250) / 53.0 (200) 54.7 (300) / 54.0 (250)	dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAC3075ARXXXXP2 HPAC3100ARXXXXP2 HPAC3140ARXXXXP2 HPAC3200ARXXXXP2 HPAC3250ARXXXXP2 HPAC3300ARXXXXP2	.98 47 to 63 P _{sat} 450 (90 to 265) 650 (90 to 265) 850 (90 to 265) 1000 (90 to 265) 1300 (180 to 265) ² 1700 (180 to 265) ²	Hz W (VAC) W (VAC) W (VAC) W (VAC) W (VAC) W (VAC)
Receive Band Noise Power Density	without filter	-155	dBW / 4 kHz

Note 1: Output power decreases over the extended portion of the frequency range. Both P_{sat} and P_{1dB} de-rate by 1 dB from 5.85 to 5.75 GHz and from 6.425 to 6.725 GHz.

Note 2: For 90 to 180 VAC operation, consult factory.

Specifications, X-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "F" Frequency selection "A"	7.10 to 7.40 7.90 to 8.40	GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{1dB}	HPAX3200ARXXXXP2	P _{sat} / P _{1dB} 53.0 (200) / 51.8 (151)	dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor Line frequency HPAX3200ARXXXXP2	.98 47 to 63 P _{sat} 1370 (180 to 265) ¹	Hz W (VAC)
Receive Band Noise Power Density	without optional filter with optional filter	-85 -155	dBW / 4 kHz dBW / 4 kHz

Note 1: For 90 to 180 VAC operation, consult factory.

Specifications, Ku-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "B" ¹ Frequency selection "A"	13.75 to 14.50 14.00 to 14.50	GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{1dB}	HPAK3100ARXXXXP2 HPAK3125ARXXXXP2	P _{sat} / P _{1dB} 50.0 (100) / 49.0 (80) 51.0 (125) / 50.0 (100)	dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor Line frequency HPAK3100ARXXXXP2 HPAK3125ARXXXXP2	.98 47 to 63 P _{sat} 1100 (90 to 265) 1200 (90 to 265)	Hz W (VAC) W (VAC)
Receive Band Noise Power Density ²		-155	dBW / 4 kHz

Note 1: Output power decreases over the extended portion of the frequency range. Both P_{sat} and P_{1dB} de-rate by 1 dB linearly from 14.00 to 13.75 GHz.

Note 2: All Ku-Band SSPAs are fitted with a receive band reject bulkhead filter, standard. An optional pressure window is available.

Common Electrical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Gain	range	55-75	dB
Gain Flatness	full band	± 1.0	dB
Gain Slope	full band (Extended C-Band)	± 1.5	dB
Gain Variation vs. Temperature	per 40 MHz	± 0.3	dB/40 MHz
Gain Stability	0 °C to +50 °C	± 1.0	dB
Gain Adjustment	at constant temperature	± 0.25	dB/24 hours
	0.1 dB resolution	20	dB
Intermodulation Distortion (Two-tone, 5 MHz spacing)	3 dB back off relative to P_{1dB}	-25	dBc
AM/PM Conversion	@ rated P_{1dB}	3.5	°/dB
	@ rated $P_{1dB} - 3$ dB	1.0	°/dB
Spurious	@ rated P_{1dB}	-65	dBc
Harmonics (SSPA only)	@ rated $P_{1dB} - 3$ dB	-50	dBc
Input/Output VSWR	Extended C-Band	1.30:1	
	Output VSWR: Ku-Band with bulkhead filter	1.50:1	
		1.40:1	
Noise Figure	at maximum gain	12	dB
Group Delay (per 40 MHz segment)	Linear	0.01	ns/MHz
	Parabolic	0.003	ns/MHz ²
	Ripple	1.0	ns p-p
Transmit Band Noise	TX Band	-75	dBW/4 KHz
Output Power Density			
Residual AM Noise, typical	Offset frequency from carrier		
	1 Hz	-110	dBc/Hz
	10 Hz	-120	dBc/Hz
	100 Hz	-130	dBc/Hz
	1 KHz	-135	dBc/Hz
	10 KHz	-140	dBc/Hz
	100 KHz	-140	dBc/Hz
	1 MHz	-140	dBc/Hz
Residual Phase Noise, typical (SSPA only)	Offset frequency from carrier		
	10 Hz	-90	dBc/Hz
	100 Hz	-100	dBc/Hz
	1 KHz	-110	dBc/Hz
	10 KHz	-120	dBc/Hz
	100 KHz	-125	dBc/Hz
	1 MHz	-130	dBc/Hz
True RF Power Detector	Range	P_{sat} to $(P_{sat} - 20)$	dB
	Accuracy	± 0.5	dBm

1RU N+1 Redundant Power Supply

The combination of a separate, fully redundant power supply is an excellent means of obtaining the ultimate in system reliability. The power supply is an N+1 redundant configuration, meaning that there is one more power supply module available than required to operate the SSPA. A failure of one power supply module will not take the amplifier off the air.





L-Band Operation

Teledyne Paradise Datacom amplifiers are available with an integrated L-Band Block Up Converter. L-Band units utilize Teledyne Paradise Datacom's proprietary zBUC technology. The addition of a zBUC® converter to the SSPA typically increases the gain by 2-4 dB. The advantages of zBUC technology include:

- zBUC converter can detect and switch to an externally supplied reference.
- Optional internal high stability (10MHz) reference.
- zBUC converter can lock to an externally supplied reference of 5, 10, 20, 25, or 50 MHz without modification.
- zBUC converter can accept a wide range of external reference power (-10 to +5 dBm).

Available Frequency Plans

Band	Model Number*	IF Input	LO Frequency	RF Output
C	Sub-Band "A"	950 - 1525 MHz	4.900 GHz	5.850 - 6.425 GHz
C	Sub-Band "B"	950 - 1825 MHz	4.900 GHz	5.850 - 6.725 GHz
C	Sub-Band "C"	950 - 1870 MHz	4.800 GHz	5.750 - 6.670 GHz
C	Sub-Band "E"	950 - 1250 MHz	5.475 GHz	6.425 - 6.725 GHz
C	Sub-Band "F"	950 - 1250 MHz	5.775 GHz	6.725 - 7.025 GHz
C	Sub-Band "G"	950 - 1675 MHz	4.800 GHz	5.750 - 6.475 GHz
X	Sub-Band "A"	950 - 1450 MHz	6.950 GHz	7.900 - 8.400 GHz
Ku	Sub-Band "A"	950 - 1450 MHz	13.050 GHz	14.00 - 14.50 GHz
Ku	Sub-Band "B"	950 - 1700 MHz	12.800 GHz	13.75 - 14.50 GHz


Electrical Specifications for 3RU RM GaN SSPA with zBUC® converter

PARAMETER	NOTES	LIMITS				UNITS
Gain	Nominal setting	75				dB
Gain Flatness	full band (C-,X-,Ku-bands)	± 2.0				dB
Gain Slope	per 40 MHz (C-,X-,Ku-bands)	± 0.5				dB/40 MHz
Gain Adjusted Range	Range	20				dB
	Typical C-Band Adj. Range	60 - 80				dB
	Typical Ku-Band Adj. Range	57 - 77				dB
Gain Stability	0 to +50 °C	± 1.5				dB
Phase Noise	Offset frequency from carrier	<u>Absolute max.</u>	<u>C-band (typ.)</u>	<u>X-band (typ.)</u>	<u>Ku-band (typ.)</u>	
	10 Hz	-30	-60	-58	-56	dBc/Hz
	100 Hz	-60	-74	-70	-67	dBc/Hz
	1 KHz	-70	-84	-80	-78	dBc/Hz
	10 KHz	-80	-100	-94	-91	dBc/Hz
	100 KHz	-90	-105	-97	-94	dBc/Hz
	1 MHz	-90	-125	-122	-120	dBc/Hz
Spurious	In-Band Signal Related (C-/Ku-Band) (Extended C-Band) Close to Carrier Spurious (≤ 20 MHz) Local Oscillator	-50 -40 -50 -30				dBc dBc dBc dBm
Noise Figure	At Maximum gain	20				dB
Transmit Band Noise Output Power Density	Tx Band at Maximum gain	-65				dBW/4kHz
Input VSWR	L-Band	1.5 : 1				
Internal Reference Option	Reference Accuracy (initial) Aging per day (after 30 days) Aging per year (after 30 days) Reference Stability over Temperature (-40 to +40 °C, ambient)	± 1 • 10 ⁻⁸ ± 1 • 10 ⁻⁹ ± 6 • 10 ⁻⁸ ± 1 • 10 ⁻⁸				



Indoor Rack Mount GaAs Solid State Power Amplifiers 3RU Rack Height

**Outline Drawing, typical,
2nd Generation 3RU C-Band SSPA
with N+1 Redundant Power Supply**

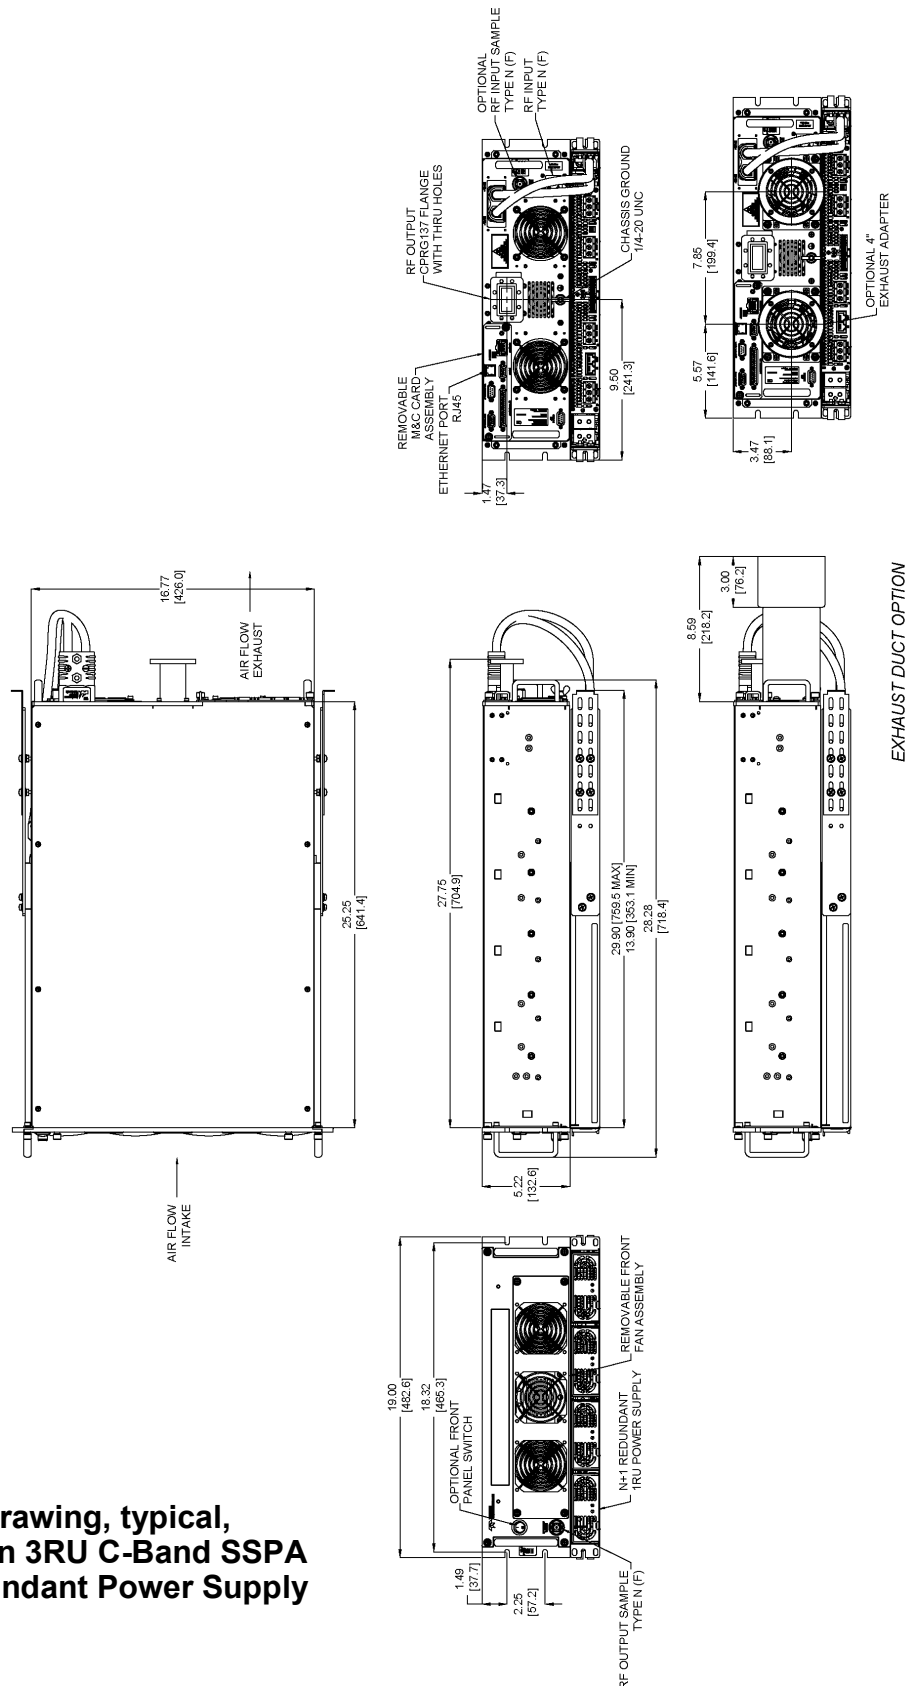

Indoor Rack Mount GaAs Solid State Power Amplifiers 3RU Rack Height


Mechanical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Size (SSPA)	width X height X depth	19.0 x 5.22 x 25.25 483 x 133 x 641	inches mm
Size (Power Supply)	width X height X depth	19.0 x 1.75 x 15.97 483 x 45 x 406	inches mm
Weight (SSPA)	Typical ($\pm 3\%$) With integrated zBUC converter	85 (38.5) +1.7 (+0.8)	lbs. (kg) lbs. (kg)
Weight (Power Supply)	with four (4) power supply modules	29 (13.2)	lbs.(kg)
Finish		Paint	Gray; powder coat
Connectors	RF Input RF Output (C-Band) RF Output (X-Band) RF Output (Ku-Band) RF Output Sample	Type N WR137 Waveguide WR112 Waveguide WR75 Waveguide Type N	Female CPR137G Flange (PDR-70) CPR112G Flange (PDR-84) Grooved flange (PBR-120) Female

Environmental Specifications

PARAMETER	NOTES	LIMITS	UNITS
Operating Temperature	Ambient	0 to +50	°C
Storage Temperature		-20 to +75	°C
Operating Relative Humidity	Non-condensing	95	%
Cooling System	Forced Convection Air Cooling	Front Panel - Intake Rear Panel - Exhaust	
Audible Noise	Measured 1m from unit, at P_{sat}	71	dBA
Altitude	No temperature de-rating up to 10,000 ft. (3000 m) De-rate maximum temperature by 2 °C per 1,000 ft (300 m) beyond 10,000 ft.		

Receive Band Filter Option

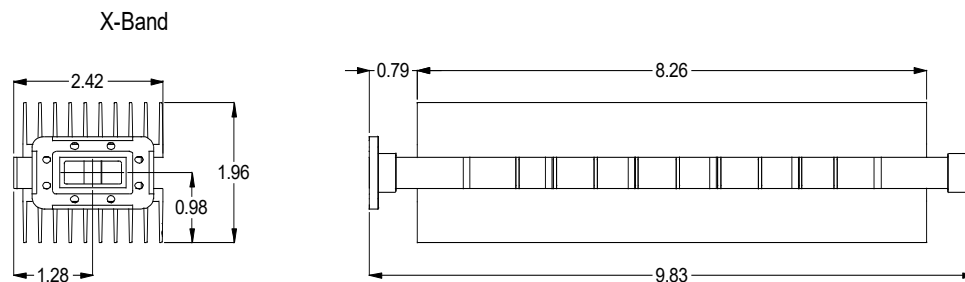

Redundant and Phase Combined Systems

Teledyne Paradise Datacom's 3RU Rack Mount SSPAs can be configured in a variety of redundant and phase combined configurations.

- 1:1 Redundant System with Internal Redundancy Control
- 1:1 Redundant System with RCP2-1100 Redundant System Controller
- 1:1 Fixed Phase Combined System with FPRC-1100 Phase Combined System Controller
- 1:2 Redundant System with Internal Redundancy Control
- 1:2 Redundant System with RCP2-1200 Redundant System Controller
- 1:2 Fixed Phase Combined System with FPRC-1200 Phase Combined System Controller

System Output Power Capacity

Due to residual losses inherent in redundant system configurations (waveguide bends; switch and coupler losses), reduce the typical output power specification of a single amplifier by approximately 0.2 dB for 1:1 and by 0.4 dB for 1:2 systems.

In phase combined systems, these same losses result in slightly less than the ideal addition of 3 dB to the output power of a single HPA unit. For 1:1 phase combined systems, the typical additive output power is approximately 2.70 dB above the output power of a single HPA. For 1:2 phase combined systems, the typical additive output power is approximately 2.50 dB above the output power of a single HPA.

Actual system losses will vary based on the system options.

System Controllers

The 1RU system controller provides an extremely user friendly interface for complete monitor and control of the amplifier system.



Redundant System Controller Configured for 1:1 Redundant Mode

The front panel touchscreen display shows the on-line amplifiers and the switch positions. Fault indicators are provided for easy identification of system status. All system monitor and control is available locally at the front panel, as well as remotely by the RS232, RS485, or Ethernet interface ports. Audible alarms and a full complement of parallel I/O signal are available at the rear panel of the controller.

Part Number Configuration Matrix

MODEL: HPA C 3 3 0 0 A R M X X X P 2

Band		
C-Band	C	
X-Band	X	
Ku-Band	K	

Rack Height	
3RU	3

Power Level (Watts)	
C-Band	075, 100, 140, 200, 250, 300
X-Band	200
Ku-Band	100, 125

Frequency Sub Band	
C-Band	
A¹	5.850 to 6.425 GHz
B¹	5.850 to 6.725 GHz
C¹	5.750 to 6.670 GHz
E¹	6.425 to 6.725 GHz (Palapa)
F¹	6.725 to 7.025 GHz (Insat)
G¹	5.750 to 6.475 GHz
X-Band	
A¹	7.90 to 8.40 GHz
F	7.10 to 7.40 GHz
Ku-Band	
A¹	14.00 to 14.50 GHz
B¹	13.75 to 14.50 GHz

¹ Available with optional BUC

Standalone Unit	
R	Standalone amplifier

COMMENTS:

Generation	
2	2nd Generation

Configuration Modifier 3	
P	Standard (External N+1 Power Supply)
L	External N+1 Power Supply + Rear Exhaust Adapters

Configuration Modifier 2	
X	Standard
P	Front Panel Power Switch
R¹	Rx Band Reject Filter
V	Reflected Power Monitor
A¹	P + R (see above)
B	P + V (see above)
C¹	V + R (see above)
D¹	P + R + V (see above)

¹ X-Band units only

Configuration Modifier 1	
X	Standard
K	110 VAC Input
S	Input Sample Port
C	K + S (see above)

System Configuration	
X	Standalone amplifier

See the following datasheets for system options:

- Indoor Rack Mount Redundant SSPA Systems (203583)
- Indoor Rack Mount Phase Combined SSPA Systems (203584)

Block Up Converter	
M	Internal Reference BUC
P	External Reference BUC
X	No BUC



Global Sales Offices

U.S., Canada, Latin America

Teledyne Paradise Datacom
11361 Sunrise Park Drive
Rancho Cordova, CA 95742
Tel: +1 (814) 954-6163
sales@paradisedata.com

Eastern Regional Sales Office

(Eastern U.S. & Latin America)
RF Inquiries: John O'Grady, (848) 220-6464
Modem Inquiries: Mike Towner, (470) 509-9941
sales@paradisedata.com

Western Regional Sales Office

(Western U.S. & Canada)
Bruce Grieser
Cell: +1 (480) 444-9676
sales@paradisedata.com

U.K. Office

Europe, Middle East, Africa
Teledyne Paradise Datacom
106 Waterhouse Lane,
Chelmsford, Essex, England, CM1 2QU
Tel: +44(0)1245 847520
Tel: +44(0)1376 515636
sales@paradisedata.com

Asia Pacific

Tavechai Mektavepong
Teledyne Paradise Datacom Thailand Office
333, 20 C1 Fl., Lao Peng Nguan Tower 1,
Vibhavadi-Rangsit Rd.,
Chomphol, Chatuchak,
Bangkok 10900
Thailand

Tel: +66 2-272-2996
Fax: +66 2-272-2997
sales@paradisedata.com

Beijing, China

Teledyne Paradise Datacom Representative Office
Room 204, No.1 Building,
No.9 Jiuxianqiao East Road,
Chaoyang District,
Beijing, China 100016

Tel: +86 13601251528
sales@paradisedata.com

Use and Disclosure of Data: This product is classified as EAR99 and is subject to U.S. Department of Commerce regulations. Export, reexport or diversion contrary to U.S. law is prohibited.

Proprietary and Confidential: The information contained in this document is the sole property of Teledyne Paradise Datacom. Any reproduction in part or as a whole without the written permission of Teledyne Paradise Datacom is prohibited.

Data Security: Teledyne Paradise Datacom amplifiers and controllers do not inherently provide encryption to transmitted data, and have limited security measures to protect it. If the unit will be accessible over the Internet, exercise appropriate data security protocols. Teledyne Paradise Datacom strongly recommends placing the equipment behind a protective Firewall or setting up a VPN link with dual authentication for remote access.

Specifications are subject to change without notice.