




Model Number:
TEEL1-4004

RF Components

L-Band Bias Tee

850 - 2150MHz

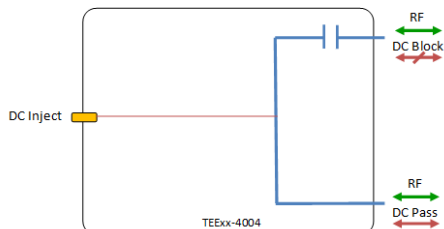

- Typical 25dB 10MHz rejection

Available with RF connector options:

- 50 Ω SMA
- 50 Ω N-type
- 50 Ω BNC
- 75 Ω BNC
- 75 Ω F-type.

Flexible Mounting
Tapped screw & through hole mounting options

Compact
housed in rugged compact enclosure

850 - 2150 MHz
operating frequency range. L-Band ready

DC
External DC powering



RF Parameters						
TEEL1-4004-XXXX		S5S5	N5N5	B5B5	B7B7	F7F7
Frequency Range		850 - 2150 MHz				
RF Connectors		50Ω SMA	50Ω N-Type	50Ω BNC	75Ω BNC	75Ω F-Type
Mean Insertion Loss (dB)	Typ.	0.4	0.5	0.5	0.6	1.0
	Max	0.8	0.9	0.9	1.0	1.5
Input Return Loss (dB)	Typ.	18	16	15	14	12
	Min	12	10	10	8	8
Output Return Loss (dB)	Typ.	18	16	15	14	12
	Min	12	10	10	8	8
10MHz Rejection is 25dB*						

Broadcast




Marine Oil & Gas



SNG & VSAT



Satellite Teleport







RF Components

Model Number:

TEEL1-4004

L-Band Bias Tee

Technical specifications and operating parameters

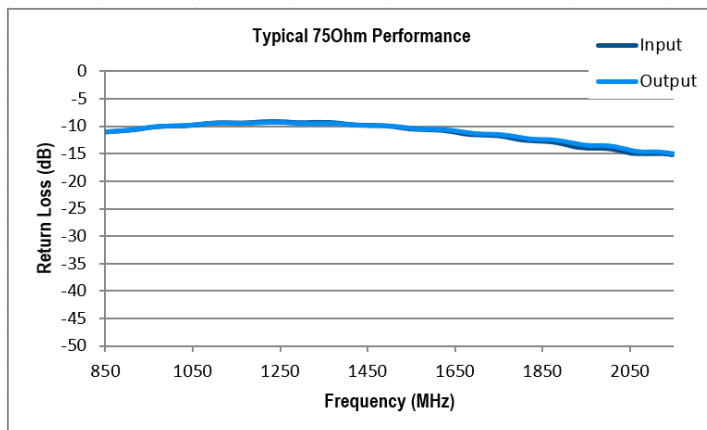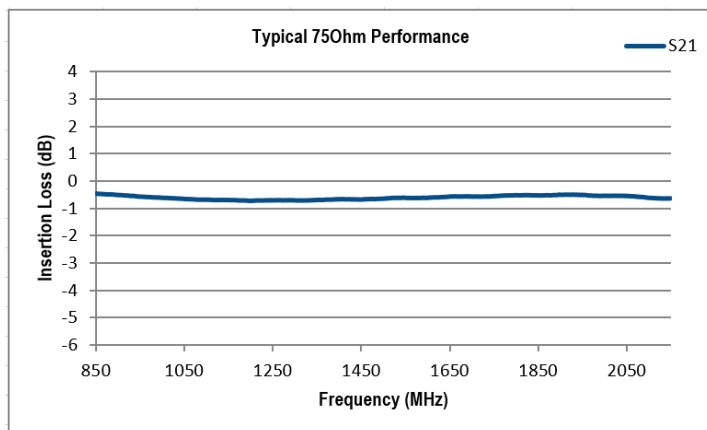


Environmental	
Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to +75°C
Location	Indoor use Only
Humidity	85% non-condensing
Altitude	10,000 feet

Max Operating Parameters	
Input RF Power	+37 dBm (5W)
DC Voltage	28V on any RF port
DC Current	0.5A

! Operation beyond these limits may cause instantaneous and permanent damage.

Physical Dimensions

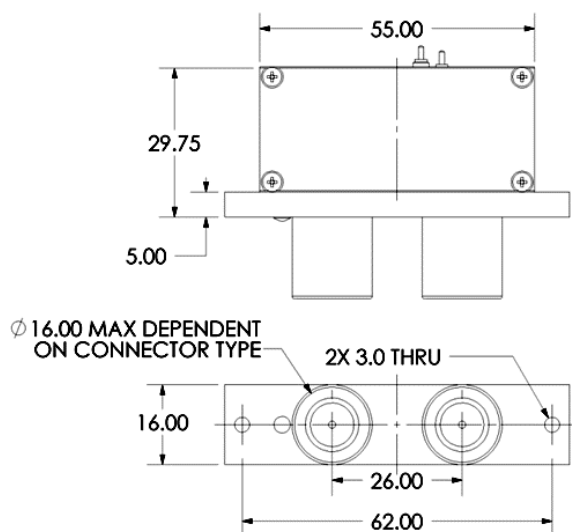

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com





RF Components

Model Number:
TEEL1-4004
L-Band Bias Tee

DC Connector Options

We are able to offer the following options for connecting external DC power supplies:

Option 1

As standard our units are supplied with a feed-thru port for external soldering of power supply cable.

Option 2

For a Male Molex DC connector supplied on the Bias TEE please use the model number and add "/1" eg. TEEL1-4007-N5N5/1

Option 3

For a Female Molex socket and cable assembly please use the model number: CABMLX-1500-F or refer to the ETL accessories section on our website.



External Power Supplies

PSU Range			
Model Number	Input	Output	Other
PSU12F125-9701-SLP	100-240V (AC), 0.6A	12V (DC), 1.25A	Solder pin output
PSU12F125-9701-ML2	100-240V (AC), 0.6A	12V (DC), 1.25A	Female 3 pin Molex socket
PSUV30V04-9708-SLP	100-240V (AC), 0.8A	12V to 24V (DC), 1.65A	Solder pin output
PSUV30V04-9708-ML2	100-240V (AC), 0.8A	12V to 24V(DC) 1.65A	Female 3 pin Molex socket
PSU48F150-9703-SLP	100-240V (AC), 2.5A	48V (DC), 3.13A	Solder pin output
PSU48F150-9703-ML2	100-240V (AC), 2.5A	48V (DC), 3.13A	Female 3 pin Molex socket
Pricing available on request			

PSU12F125-9701



PSUV30V04-9708



Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport

