

CEL-FI QUATRA 4000e


In-Building Cellular Coverage Solution

MODEL NUMBERS: Q44-E999CNU & Q41-EECU | Q44-FGSGCNU & Q41-HXCU

Solving cellular coverage challenges for enterprise environments, CEL-FI QUATRA 4000e is a multi-carrier Active DAS Hybrid that offers uniform, high-quality cellular signal throughout any building. As an all-digital solution, QUATRA 4000e utilizes category cabling for RF and Power-over-Ethernet architecture to deliver industry-leading signal gain and scalability. In addition to unmatched performance, this cost-effective, carrier-grade system offers fiber expansion capabilities and can be installed within days. QUATRA 4000e is also carrier approved and guaranteed network safe.

Features and benefits include:

- Scalable all-digital Active DAS Hybrid for enterprise
- Multi-carrier signal booster for 3G, 4G, and 5G with industry-leading signal gain up to 100 dB
- Lossless RF signal and Power-over-Ethernet (PoE) distribution with easy-to-install category cable architecture
- Site installation flexibility with operator specific donor antenna or small cell signal source
- Remotely monitor and configure with Nextivity WAVE Portal cloud management
- Carrier approved and unconditionally network safe

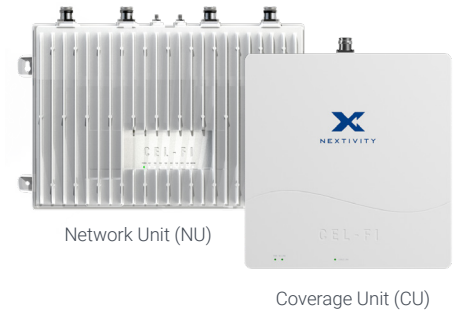

Bands

Bands	Q44-E999CNU	Q44-FGSGCNU	Downlink MHz	Uplink MHz	Technology	Uplink Power (dBm)	Downlink Power* (dBm)
1	All Ports	All Ports	2110-2170	1920-1980	5G/4G/3G/20MHz	22	22
3	All Ports	All Ports	1805-1880	1710-1785	5G/4G/3G/20MHz	22	22
5**		Ports B & D only	869-890	824-845	5G/4G/3G/20MHz	20	20
7	All Ports	All Ports	2620-2690	2500-2570	5G/4G/3G/20MHz	22	22
8	All Ports	Ports A & C only	925-960	880-915	5G/4G/3G/15MHz	20	22
20	All Ports		791-821	832-862	5G/4G/3G/20MHz	20	22
26**		Ports B & D only	859-890	814-845	5G/4G/3G/20MHz	20	20
28**		All Ports	758-803	703-748	5G/4G/3G/20MHz	20	20
40	Port A only	Port A only		2300-2390	5G/4G/3G/20MHz	22	20*

*Q41-EECU can only go up to 19dBm | *Composite power tolerance of +/-3.7 dBm max. | **Band 5/26 and Band 28 cannot be relayed on the same donor port

Specifications

Frequency Bands	1/3/5/7/8/20/26/28/40
Relay Channel Bandwidths	5/10/15/20 MHz
Network Protocols	WCDMA/LTE/DSS/NR
Network Selection	Automatically best available (WAVE Portal for manual setting)
Duplex Modes	FDD & TDD
# of Relay Bands	8 max. (2 bands per NU donor port)
Relay Bandwidths	Port A/D: 20 + 20 MHz max. Port B/C: 20 + 10 MHz max.
Independent Operators Supported	4 max.
System Gain	100 dB max.
Enterprise-Grade Echo Cancellation	30 dB min.
Noise Figure (All Bands)	7 dB max. at ambient
Return Loss	8 dB min.
UL Transmit EVM	8.5 %, 16-QAM with full RB allocation
DL Transmit EVM	8.5%, E-TM3.1
DL Input Level	-100 to -38 dBm
RF Interface Impedance (All Ports)	50 Ω
NU to CU Cable	2x Category Cables ANSI/TIA/EIA 568-B Compliant
NU to CU Cable Distance	328 ft (100 m) (656 ft (200 m) with CEL-FI QUATRA Range Extender)
Product Settings & SW Updates	WAVE Portal for Desktop

Network Unit Interface

Donor Port RF Connectors	4x 4.3-10 (f)
Power Port	IEC C14
Power Control	ON/OFF Switch
Cellular Modem Antenna Connector	1x SMA (f)
Cellular Modem GPS Antenna Port	1x SMA (f)
Cellular Modem SIM	Nano SIM (Included with 1-year free service)
Status LED (Power/LAN/Modem)	Bi-Color Green/Red
Status LED (6x CU Link/SFP+)	Green
CU Interface	2x RJ45 per CU
# of CU max. per NU	6
NU-Hub Expansion	SFP+
# of CU max per CEL-FI QUATRA 4000e Fiber Hub (Q40-EFNU)	6
Monitoring & Management	LAN RJ45
COMPASS XR and Factory Debug	USB 2.0 Micro-B

Coverage Unit Interface

Server Antenna RF Connector	4.3-10 (f)
NU Connectivity	2x RJ45
Status LED (Power)	Bi-Color Green/Red
Status LED(NU Link/Cable Link)	Green
Factory Debug Only	USB 2.0 Micro-B

Power

Input Voltage	85-264 V
Input Current	2.45 A
Power Consumption	480 W max.
Power Cable	Type C (EU) or Type I (AUS) or Type G (UK) to IEC C13
Power Supply Cable	18 AWG
Power Supply Cable Length	6 ft (1.8 m)
Coverage Unit Power	PoE+ per IEEE 802.3at

Mechanical

	Network Unit	Coverage Unit
Main Unit Dimensions	18.1 x 11.0 x 3.5 in (461 x 281 x 89 mm)	13.0 x 11.6 x 2.5 in (330 x 295 x 64 mm)
Main Unit Weight	19.4 lbs (8.80 kg)	11.3 lbs (5.13 kg)
Mounting	Wall	Wall/Ceiling*


*CMA-100-100 sold separately for ceiling mount


Ordering Information

M/N	Q44-E999CNU	Q44-FGSGCNU	Q41-EECU	Q41-HXCU
Region	EMEA	EMEA/APAC	EMEA	EMEA/APAC
Frequency Bands	1/3/7/8/20/40	1/3/5/7/8/26/28/40	1/3/7/8/20/40	1/3/5/7/8/26/28/40
Box Contents	Network Unit		Coverage Unit	
	1x AC Power Cable		4x Mounting Screws	
	4x Mounting Screws		4x Drywall Anchors	
	4x Drywall Anchors		2x Eye Bolt w/ nuts	
	1x Cellular Modem Antenna			
Shipping Dimensions	23.9 x 14.7 x 5.6 in (607 x 374 x 141 mm)		18.2 x 15.8 x 4.6 in (462 x 402 x 116 mm)	
Shipping Weight	22.5 lbs (10.21 kg)		13.6 lbs (6.2 kg)	
GTIN-12 (UPC)	812037032646	812037034398	812037032639	812037034404


Note: Product specifications are subject to change without prior notification.

Network Unit (NU)

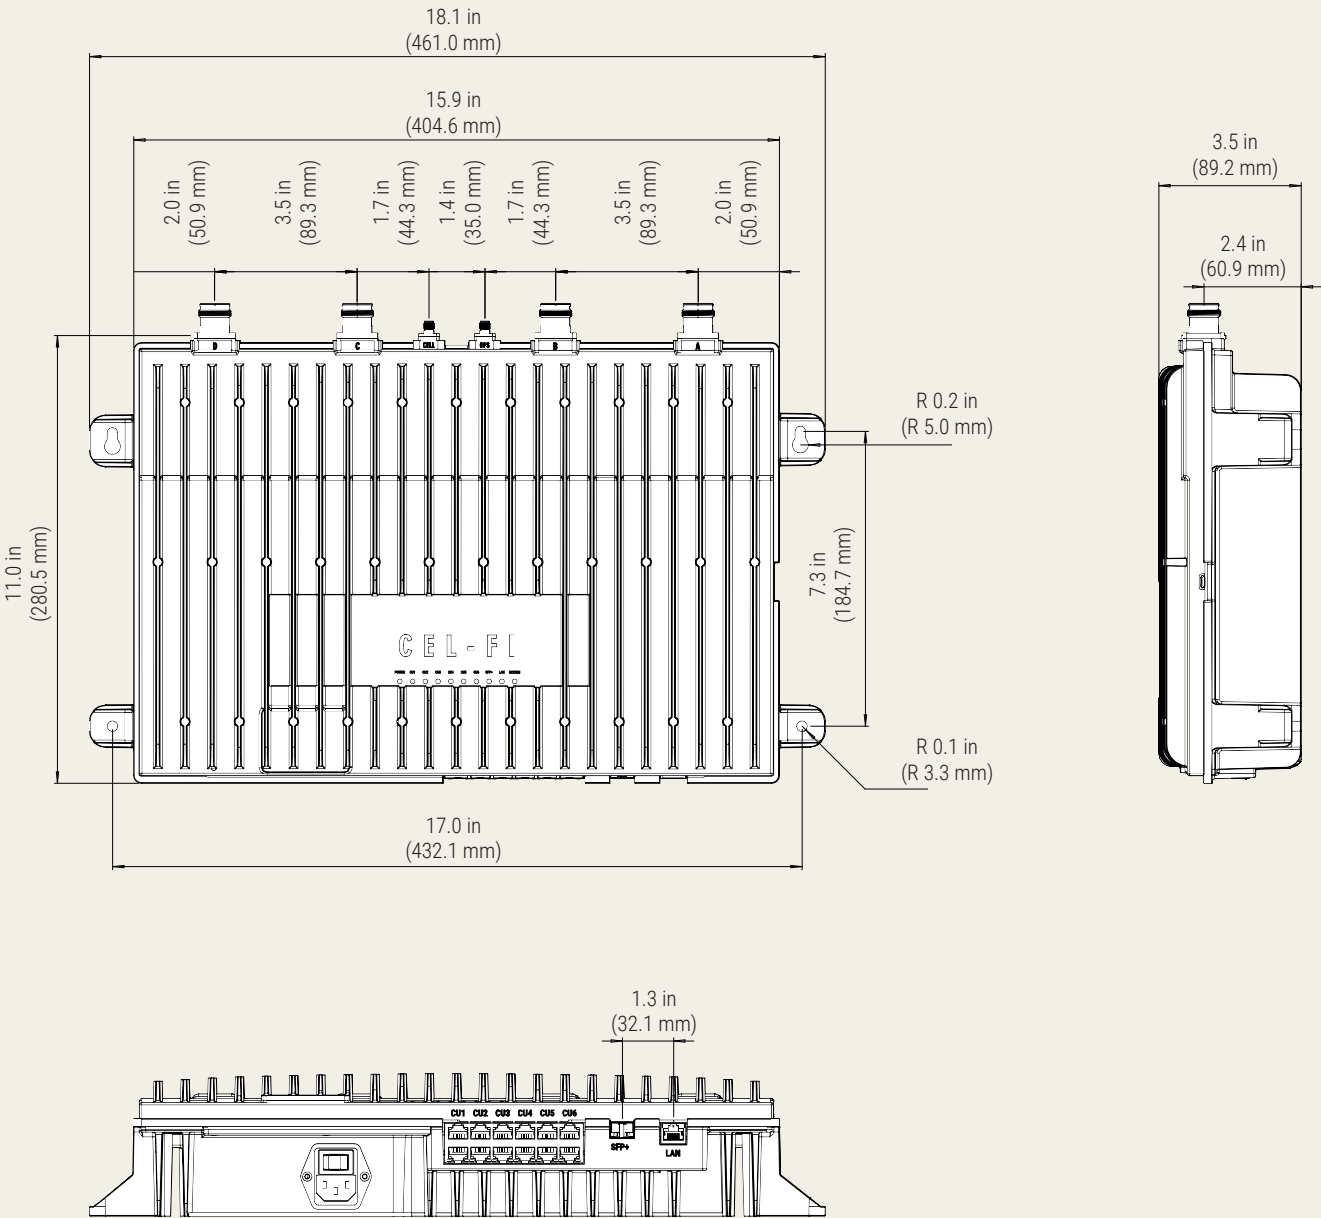

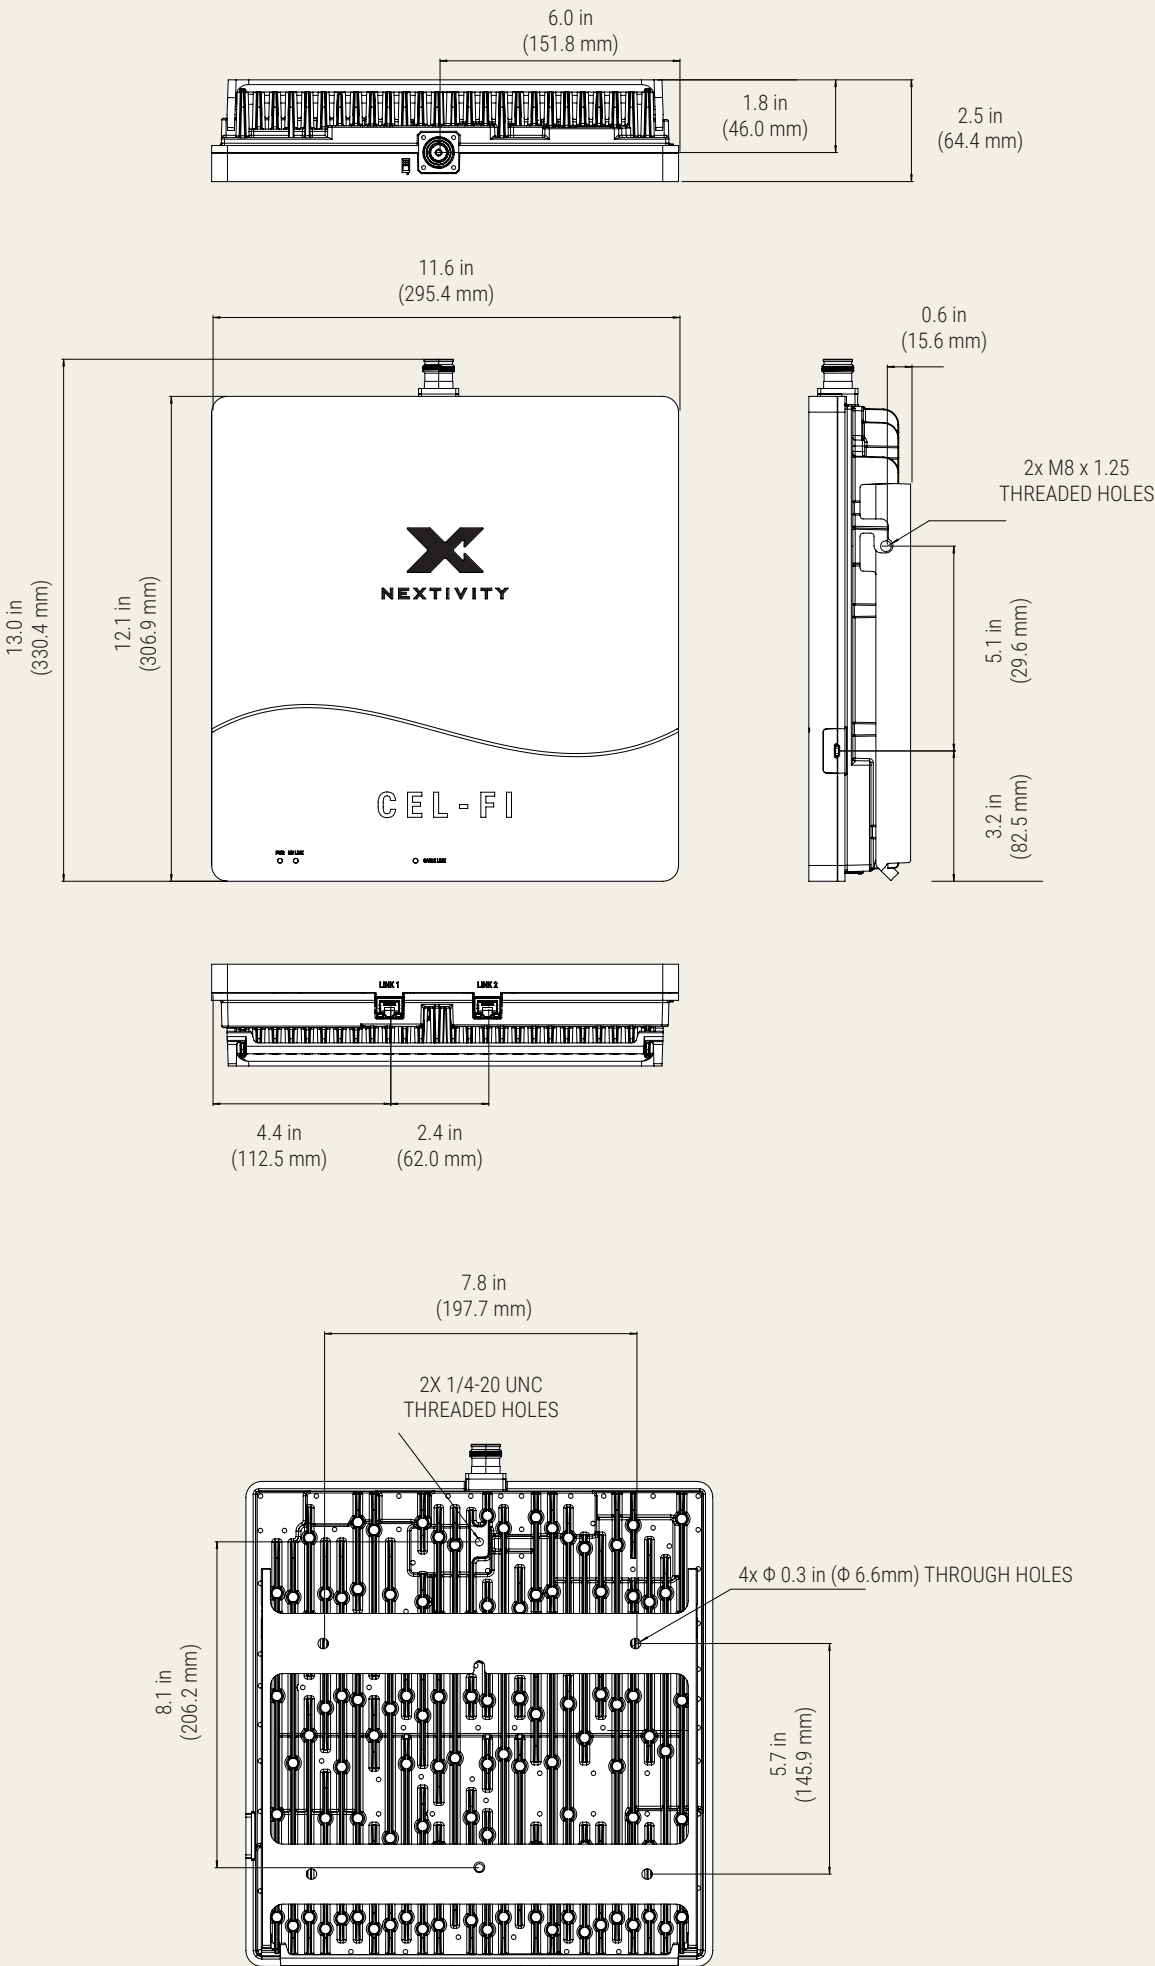

Two-Building Diagram: 1 NU to 12 CUs with CEL-FI QUATRA 4000e Fiber Hub

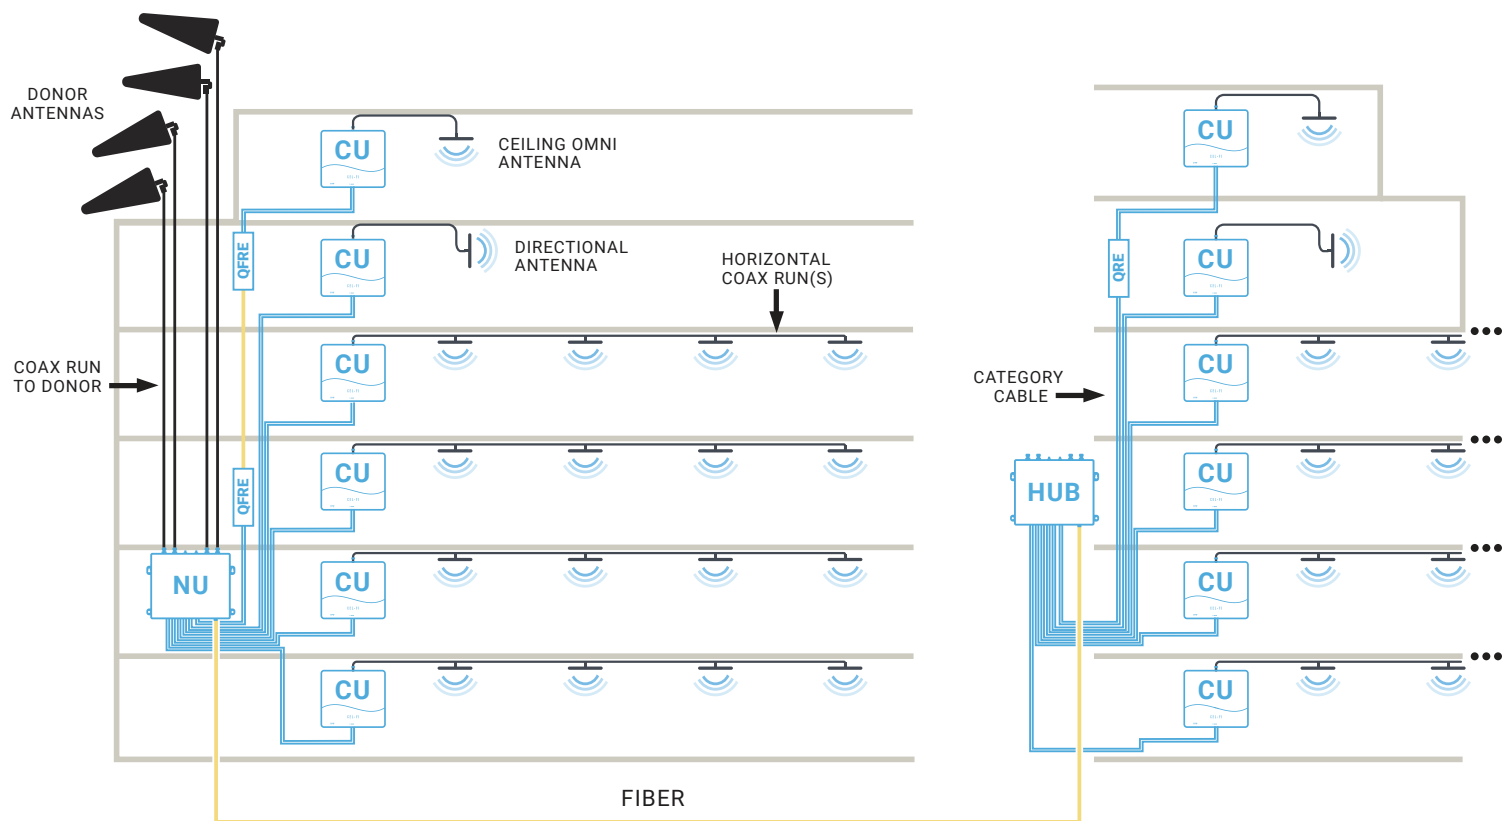

Note: Product specifications are subject to change without prior notification.

