



ESER620KA2A

ANCHOR 6.2m Ka-Band Earth Station Antenna

of Ports: 2-ports

We recommend purchasing the corresponding Antenna Control System along with the **motorized** Earth Station, unless you plan to develop the control system yourself. Please note that the Antenna Control System is sold separately at an additional cost. For Manual Structure Antennas, a control system is not required.



KEY SPECIFICATIONS

Band	Ka-Band
------	---------

ANTENNA SPECIFICATIONS

Antenna Aperture	6.2m
Antenna Drive Mode	2-axis motorized structure
Antenna Type	Ring Focus
Number Of Ports	2-ports
Polarization	Linear / Circular
Rx Axial Ratio 2 Ports	1.25 dB
Sidelobe	$\leq -14\text{dB}$; $29 - 25 \log\theta (1^\circ \leq \theta < 20^\circ)$
Tx Axial Ratio 2 Ports	1.25 dB

RF SPECIFICATIONS

Noise Temperature Elevation 10°	115 K
Noise Temperature Elevation 30°	74 K
Noise Temperature Elevation 50°	70 K
Port Isolation Rx-tx	85 dB
Rx Feed Insertion Loss	0.6 dB
Rx Frequency	17.70 - 21.20 GHz
Rx Gain	59.87 @ 19.95GHz
Rx VSWR	1.35 : 1
Tx Feed Insertion Loss	0.6 dB
Tx Frequency	27.50 - 31.00 GHz

Tx Gain	63.34 @ 29.75GHz
Tx VSWR	1.35 : 1

ELECTRICAL SPECIFICATIONS

Power Capacity	2 KW
-----------------------	------

INTERFACE SPECIFICATIONS

Rx Interface	WR-42
Tx Interface	WR-28

ENVIRONMENTAL SPECIFICATIONS

Humidity	1.0
Ice Load	Icing 13mm: normal work; Icing 25mm: no damage
Seismic Capacity Horizontal	0.3 G
Seismic Capacity Vertical	0.1 G
Temperature Operational	-30 - 50°C
Windspeed Operational	72 km/h
Windspeed Survival	216 km/h


PHYSICAL SPECIFICATIONS

Loading Capacity	1 set for 40ft container
Motion Range AZ	±70°(Truss type), 5° - 355° continuous (turntable type)
Motion Range EL	5° - 90°
Motion Range POL	±90°
Product Package Volume	5 packages, dimension: 22 CBM
RMS	≤0.3 mm
Structure	LMC/ FMC

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
		China		3590 kg

HOW TO ORDER

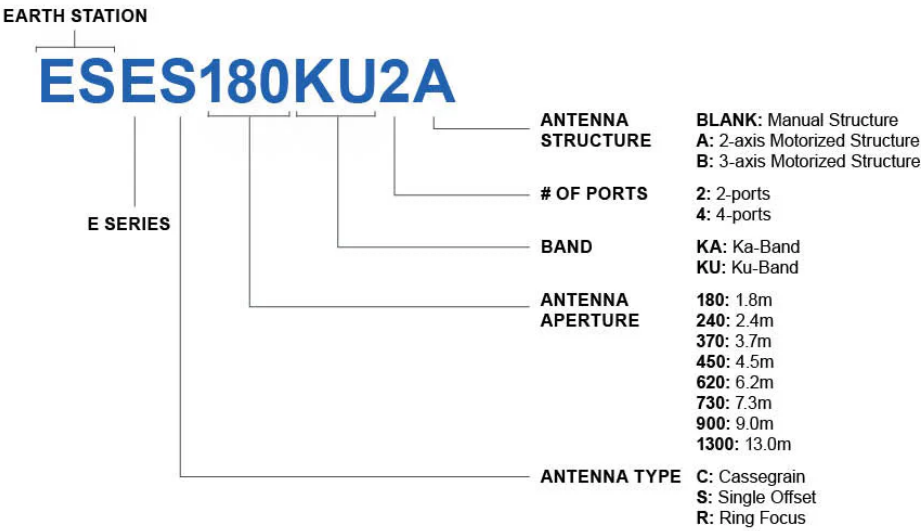

MECHANICAL DIAGRAMS