



BDC-KU10HACF

Single-Band Ku-Band BDC (10 KHz max.)

Frequency: Ku-Band: 10.7 - 11.7 GHz

Power Connector: Output connector only

Output Connector: F Connector



KEY SPECIFICATIONS

Band	Ku-Band
L O Frequency 1	9.75 GHz
L O Stability	10 KHz max.
Noise Figure	15 dB max.
Output Frequency Band 1	950 - 1950 MHz
Required Current	300 mA max.

RF SPECIFICATIONS

Conversion Gain	20 dB typ., 17 dB min., 23 dB max.
Frequency Range	Ku-Band: 10.7 - 11.7 GHz
Gain Flatness	4 dB p-p max.
Gain Ripple (At Per 36 M Hz)	1 dB p-p max.
Image Rejection	40 dBc min.
Input V S W R	2.0 : 1 max.
Output P1D B	5 dB max.
Output V S W R	2.0 : 1 max.
Phase Noise 100Khz Offset	-95 dBc/Hz
Phase Noise 10Khz Offset	-80 dBc/Hz
Phase Noise 1Khz Offset	-70 dBc/Hz
Reference	Internal Reference



Last updated: 2024/06/20



ELECTRICAL SPECIFICATIONS

Power Connector	Output connector only
Power Supply	+12 to +24 VDC

INTERFACE SPECIFICATIONS

R F Input Connector	SMA Connector
R F Output Connector	F Connector

ENVIRONMENTAL SPECIFICATIONS

I P Rating	IP 67
Temperature Operational	-40 to +60°C


PHYSICAL SPECIFICATIONS

Product Dimensions (Lx Wx H)	89.6 x 78.0 x 40.0 mm
Product Weight	400 g

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	ECCN Number	Unit Package
8517700000	Made in Korea	EAR99	145 x 95 x 65 mm 400 g

HOW TO ORDER

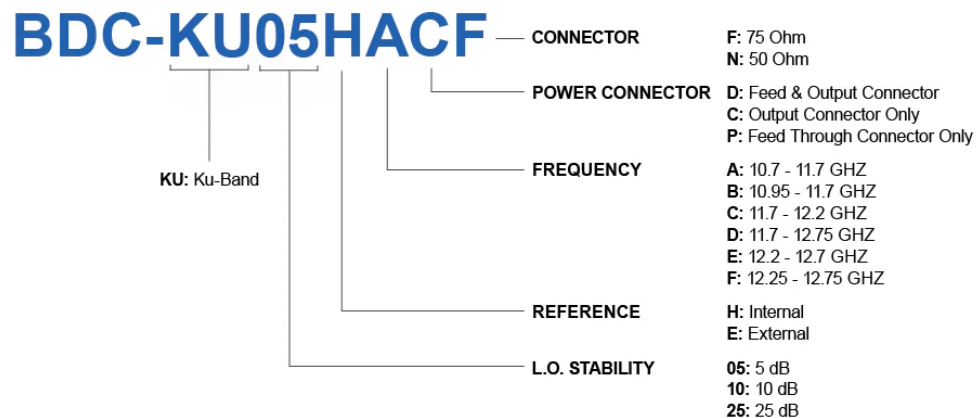

MECHANICAL DIAGRAMS



Last updated: 2024/06/20

