


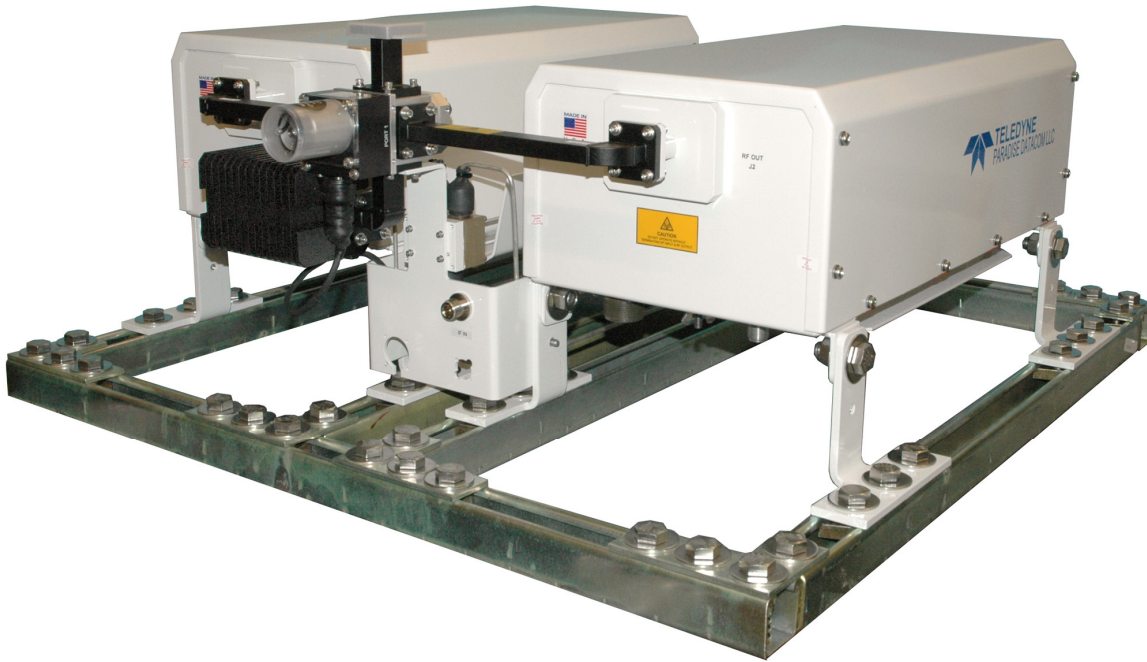

150W Ku-Band Compact Outdoor 1:1 Redundant System

DESCRIPTION

Teledyne Paradise Datacom's Outdoor series of redundant amplifier systems provide the highest degree of earth station redundancy and reliability. Based on Teledyne Paradise Datacom's family of rugged and robust SSPAs, these systems provide the highest MTBFs possible.

These systems can be configured in either 1:1 or 1:2 redundant configurations using any of the Teledyne Paradise Datacom family of Outdoor SSPAs. The RCP2-1100/1200 Redundant Controller provides an extremely user-friendly interface for complete monitor and control of the high power amplifiers in either 1:1 or 1:2 configurations.


The RCP front panel mimic display shows the on-line amplifiers and the current switch positions. Dedicated fault lights provide easy indication of system status. All RCP2-1X00 monitor and control is available locally, at the front panel LCD display, as well as remotely by the RS-232 or RS-485 interface ports.

FEATURES

- System Output Power to:
1000W L-Band;
1000W S-Band;
1000W C-Band;
800W X-Band;
600W Ku-Band
- Universal Input,
Power Factor
Corrected Power Supply
- Output Power Monitoring
- Separate 1RU Redundant
Controller or Controller-less
configurations

OPTIONS

- System Output Power
Monitor
- Reflected Power Alarm
- W/G Arc Protection Kit
- L-Band Input Operation
- Cold Standby Operation
- Custom Configurations

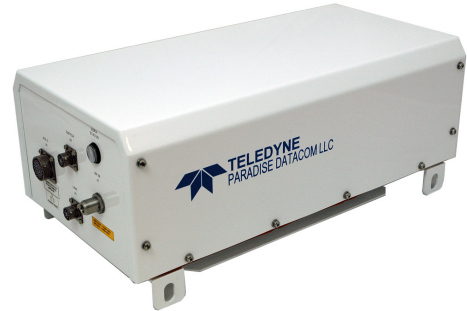

High Power Outdoor Output Power Ranges

Band	GaAs (W)	GaN (W)
L-Band	N/A	600 - 1kW
S-Band	N/A	600 - 1kW
C-Band	400 - 600	800 - 1kW
X-Band	N/A	800
Ku-Band	N/A	400 - 600

See document # 214164 for GaAs High Power Outdoor SSPAs, and document # 211669 for GaN High Power Outdoor SSPAs

Compact Outdoor Output Power Ranges

Band	GaAs (W)	GaN (W)
L-Band	N/A	100 - 500
S-Band	N/A	100 - 500
C-Band	75 - 300	300 - 500
X-Band	200	300 - 400
Ku-Band	100 - 125	200 - 250

See document # 205485 for GaAs Compact Outdoor SSPAs, and document # 209555 for GaN Compact Outdoor SSPAs

System Output Power Capacity

Due to residual losses inherent in redundant system configurations (waveguide bends; switch and coupler losses), reduce the typical output power specification of a single amplifier by approximately 0.2 dB for 1:1 and by 0.4 dB for 1:2 systems.

For example, a single thread 100W Ku-Band Compact Outdoor SSPA has a typical saturated output power of 50.0 dB (100W).

Placing two of the above amplifiers in a 1:1 redundant system configuration would reduce the typical system saturated output by 0.2 dB to 49.8 dB (96W).

Placing three of the above amplifiers in a 1:2 redundant system configuration would reduce the typical system saturated output by 0.4 dB to 49.6 dB (91W).

Actual system losses will vary based on the system options.

General Specifications

PARAMETER	NOTES	LIMITS	UNITS
Gain	minimum	70	dB
Gain Flatness	full band	± 1.0	dB
	full band (Extended C-Band)	± 1.5	dB
Gain Slope	per 40 MHz (C-, X-, Ku-Bands)	± 0.3	dB/40 MHz
	per 10 MHz (L-, S-Band)	± 0.2	dB/10 MHz
Gain Variation vs. Temperature	-30 °C to +50 °C	± 1.0	dB
Gain Stability	at constant temperature	± 0.25	dB/24 hours
Gain Adjustment	0.1 dB resolution	20	dB
Intermodulation Distortion	3 dB back off relative to P_{1dB}	-25	dBc
AM/PM Conversion	(@ rated P_{1dB})	3.5	°/dB
	(@ $P_{1dB} - 3$ dB)	1.0	°/dB
Spurious	(@ rated P_{1dB})	-65	dBc
Harmonics	(@ rated $P_{1dB} - 3$ dB) (C-, X-, Ku-bands)	-50	dBc
	(@ rated $P_{1dB} - 3$ dB) (L-, S-band)	-30	dBc
Input/Output VSWR	Output VSWR: Ku-Band with bulkhead filter	1.50:1 1.40:1	
Noise Figure	at maximum gain (C-, X-, Ku-bands)	10	dB
	at maximum gain (L-, S-Band)	8	dB
Group Delay (per 40 MHz segment)	Linear	0.01	ns/MHz
	Parabolic	0.003	ns/MHz ²
	Ripple	1.0	ns p-p
Transmit Band Noise	TX Band	-75	dBW/4 KHz
Output Power Density	RX Band (C- or Ku-bands)	-150	dBW/4 KHz
	RX Band (X-Band)	-100	dBW/4 KHz
	RX Band (L-, S-Band)	See options	
Receive Band Noise	L-, S-Band, with optional filter	-155	dBW/4 KHz
Output Power Density	L-, S-Band, without optional filter	-95	dBW/4 KHz
Residual AM Noise	0 - 10 KHz	-45	dBc
	10 KHz - 500 KHz	-20 (1.25 + log F)	dBc
	500 KHz - 1 MHz	-80	dBc
Phase Noise	Offset frequency from carrier		
	10 Hz	-90	dBc/Hz
	100 Hz	-100	dBc/Hz
	1 KHz	-110	dBc/Hz
	10 KHz	-120	dBc/Hz
	100 KHz	-125	dBc/Hz
	1 MHz	-130	dBc/Hz

Environmental

Operating Temperature	Ambient	-40 to +60	°C
Relative Humidity	Condensing	100	%
Cooling System	Integrated	Forced air	

Mechanical

Size, High Power Outdoor, single	width X length X height	16.5 X 27.5 X 9.335	inches
Size, Compact Outdoor, single	width X length X height	419 X 699 X 238	mm
		10.0 X 19.5 X 6.50	inches
		254 X 495 X 165	mm
Weight, High Power Outdoor, single	Base unit (<200W S/C-bands)	100 (45.5)	lbs. (kg)
Weight, Compact Outdoor, single	Base unit (≥ 200 W S/C-bands; ≥ 100 W Ku)	36 (16.4) $\pm 3\%$	lbs. (kg)
	Base unit (≥ 200 W X-Band)	44 (20.0) $\pm 3\%$	lbs. (kg)
	With Internal zBUC	54.9 (25.0) $\pm 3\%$	lbs. (kg)
		+1.7 (0.8)	lbs. (kg)
Finish		Paint	White; powder coat

L-Band Operation

Teledyne Paradise Datacom amplifiers are available with an integrated L-Band Block Up Converter. L-Band units utilize Teledyne Paradise Datacom's proprietary zBUC technology. Adding a zBUC® converter to an SSPA typically increases the gain by 2-4 dB. In addition:

- the zBUC converter can detect and switch to an externally supplied reference.
- an optional internal high stability (10MHz) reference is available.
- the zBUC converter can lock to an externally supplied reference of 10 or 50 MHz.
- the zBUC converter can accept a wide range of external reference power (-10 to +5 dBm).
- the zBUC converter can accept FSK monitor and control signal via the IFL.

Available Frequency Plans










Band	Model Number	IF Input	LO Frequency	RF Output
C	Sub-Band "A"	950 - 1525 MHz	4.900 GHz	5.850 - 6.425 GHz
C	Sub-Band "B"	950 - 1825 MHz	4.900 GHz	5.850 - 6.725 GHz
C	Sub-Band "C"	950 - 1870 MHz	4.800 GHz	5.750 - 6.670 GHz
C	Sub-Band "E"	950 - 1250 MHz	5.475 GHz	6.425 - 6.725 GHz
C	Sub-Band "F"	950 - 1250 MHz	5.775 GHz	6.725 - 7.025 GHz
C	Sub-Band "G"	950 - 1675 MHz	4.800 GHz	5.750 - 6.475 GHz
C	Sub-Band "L"	950 - 1550 MHz	3.450 GHz	4.400 - 5.000 GHz
X	Sub-Band "A"	950 - 1450 MHz	6.950 GHz	7.900 - 8.400 GHz
Ku	Sub-Band "A"	950 - 1450 MHz	13.050 GHz	14.00 - 14.50 GHz
Ku	Sub-Band "B"	950 - 1700 MHz	12.800 GHz	13.75 - 14.50 GHz


Electrical Specifications for Outdoor SSPA with ZBUC converter

PARAMETER	NOTES	LIMITS				UNITS
Gain	Nominal setting	75				dB
Gain Flatness	full band (C-,X-,Ku-bands)	± 2.0				dB
Gain Slope	per 40 MHz (C-,X-,Ku-bands)	± 0.5				dB/40 MHz
Gain Adjusted Range		20				dB
	Typical C-Band Adj. Range	60 - 80				dB
	Typical Ku-Band Adj. Range	57 - 77				dB
Gain Stability	-40 to +60 °C	± 1.5				dB
Phase Noise	Offset frequency from carrier	Absolute max.	C-band (typ.)	X-band (typ.)	Ku-band (typ.)	
	10 Hz	-30	-60	-58	-56	dBc/Hz
	100 Hz	-60	-74	-70	-67	dBc/Hz
	1 KHz	-70	-84	-80	-78	dBc/Hz
	10 KHz	-80	-100	-94	-91	dBc/Hz
	100 KHz	-90	-105	-97	-94	dBc/Hz
	1 MHz	-90	-125	-122	-120	dBc/Hz
Spurious	In-Band Signal Related (C-/Ku-Band)					
	(Extended C-Band)					
	Close to Carrier Spurious (≤ 20 MHz)					
	Local Oscillator					
Noise Figure	At Maximum gain	20				dB
Transmit Band Noise Output Power Density	Tx Band at Maximum gain	-65				dBW/4kHz
Input VSWR	L-Band	1.5 : 1				
Internal Reference Option	Reference Accuracy (initial)	± 1 • 10 ⁻⁸				
	Aging per day (after 30 days)	± 1 • 10 ⁻⁹				
	Aging per year (after 30 days)	± 6 • 10 ⁻⁸				
	Reference Stability over Temperature (-40 to +40 °C, ambient)	± 1 • 10 ⁻⁸				


Reference Options in Redundant Systems with L-Band Input

See below for BUC configurations in which the 10 MHz reference can be distributed to units in redundant systems. Converters with internal reference oscillators automatically switch to an externally applied reference.

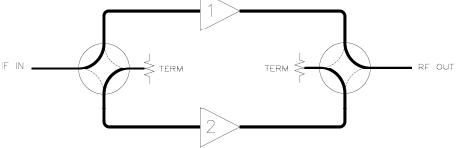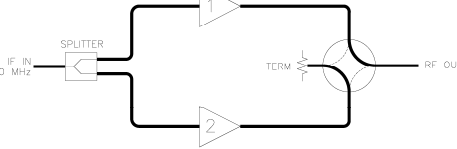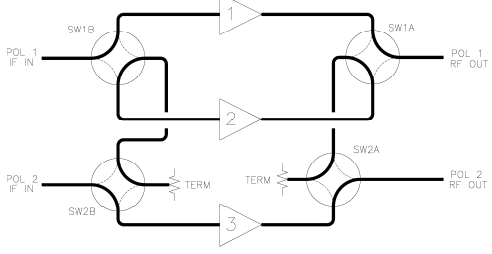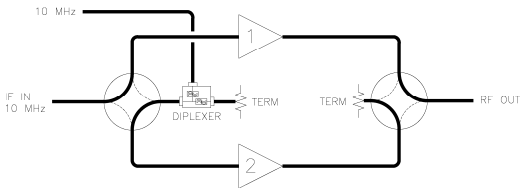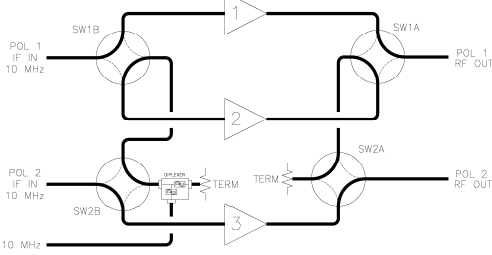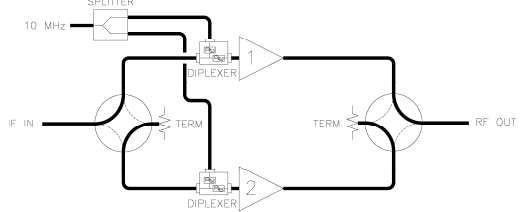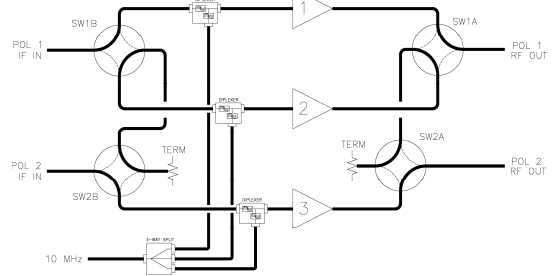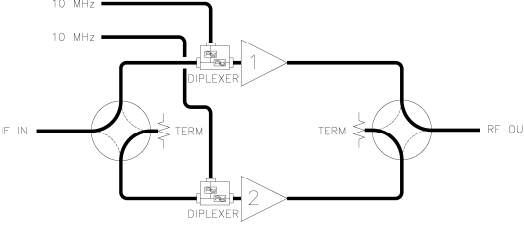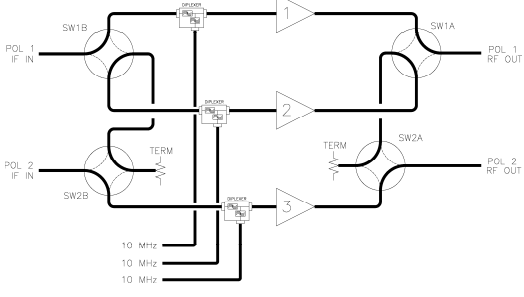1:1 Redundant Systems	Ref. Option	1:2 Redundant Systems
Internal Reference Standard for BUC option 'M' with input switching  Internal/External Reference Standard for BUC option 'M' or 'P' with input splitting 	Option 1	Internal Reference Standard for BUC option 'M' 
External 10 MHz Diplexed to Standby Unit 	Option 2	External 10 MHz Diplexed to Standby Unit 
Single External 10 MHz Diplexed to Each Unit Standard for BUC option 'P' with input switching 	Option 3	Single External 10 MHz Diplexed to Each Unit Standard for BUC option 'P' 
Separate External 10 MHz Diplexed to Each Unit 	Option 4	Separate External 10 MHz Diplexed to Each Unit 

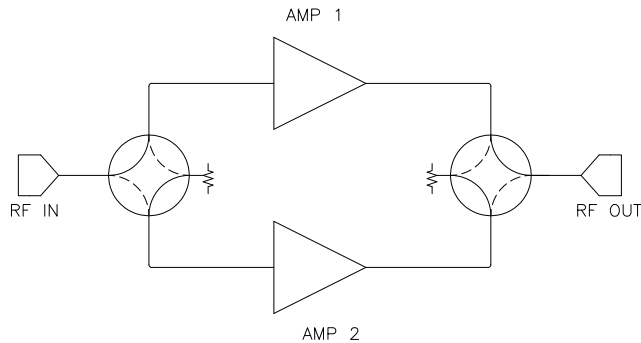


1:1 Redundant HPA System

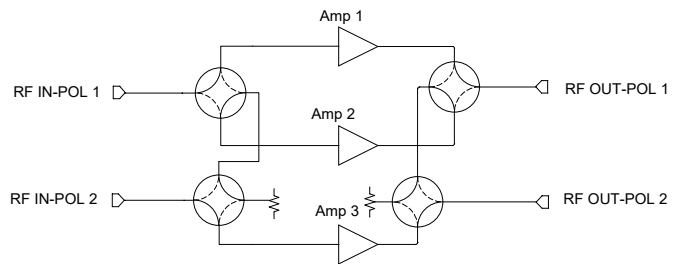

1:2 Redundant HPA System

Teledyne Paradise Datacom's Outdoor Packaged Redundant Systems are designed with built-in redundancy for 1:1 systems. All system-level monitor and control is internal and no separate controller is required, although an optional RCP2-1100 1:1 Redundant System Controller is available. Either Ethernet or RS-485 communications are selectable for user monitor and control. All 1:2 redundant systems require a separate RCP2-1200 Redundant System Controller.

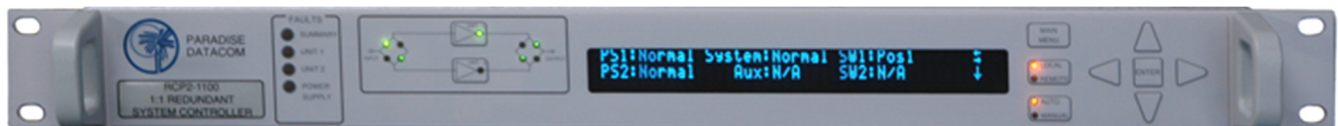

RCP2-1100 1:1 Redundant System Controller










RCP2-1200 1:2 Redundant System Controller


The RCP2-1200 1:2 Redundant System Controller is the heart of the 1:2 redundant system. It provides an extremely user friendly interface for complete monitor and control of the high power amplifiers. The front panel mimic display shows the on-line amplifiers and the current switch positions. Dedicated fault lights are provided for easy indication of system status.


All Redundant System Controller monitor and control is available locally, at the front panel LCD display, as well as remotely by the RS-232, RS-485 or Ethernet interface ports. Audible alarms and a full compliment of parallel I/O signal are available at the rear panel.

Outline Drawing, 1:1 C-Band High Power Outdoor SSPA System with RCP2-1100

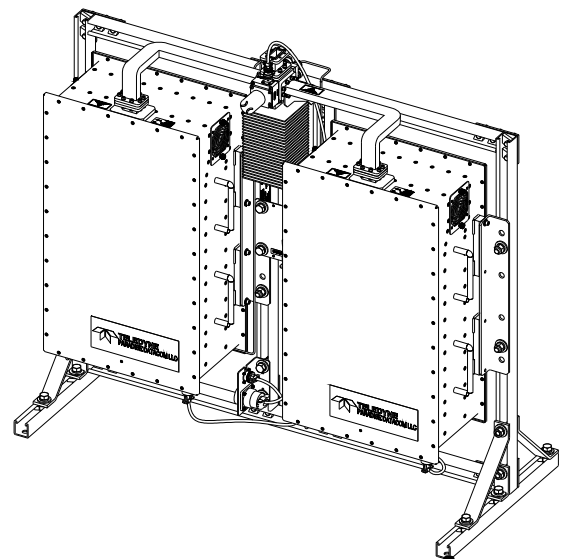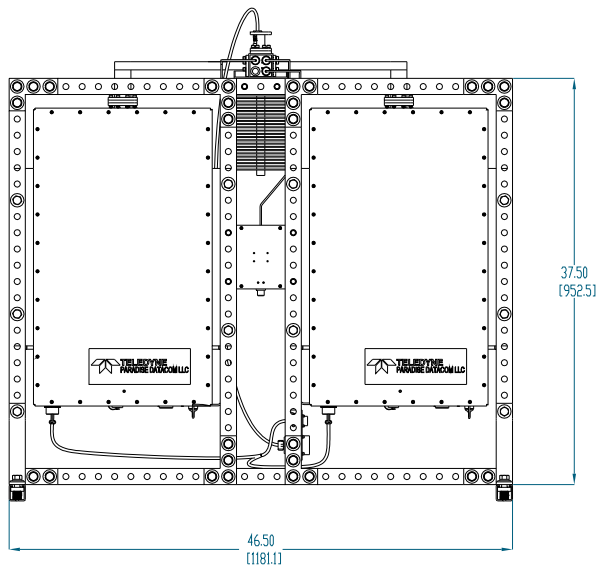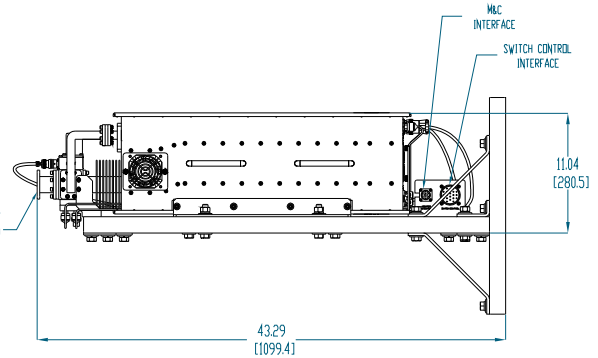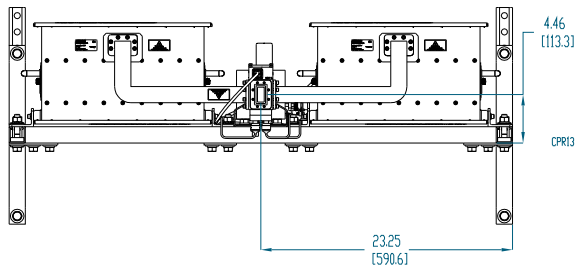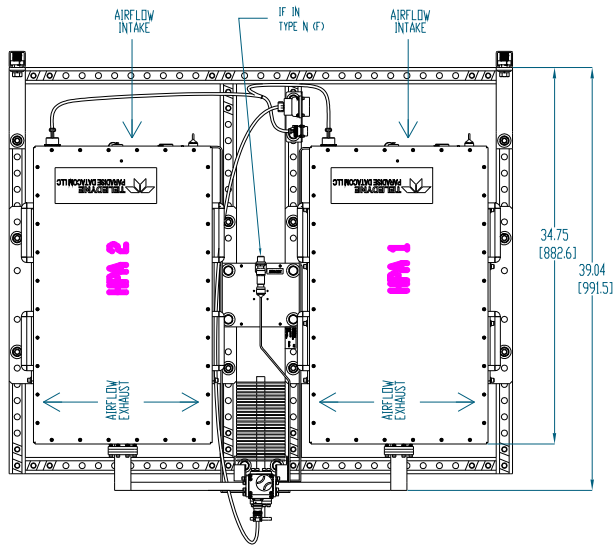


Outline Drawing, 1:2 C-Band Compact Outdoor SSPA System with RCP2-1200

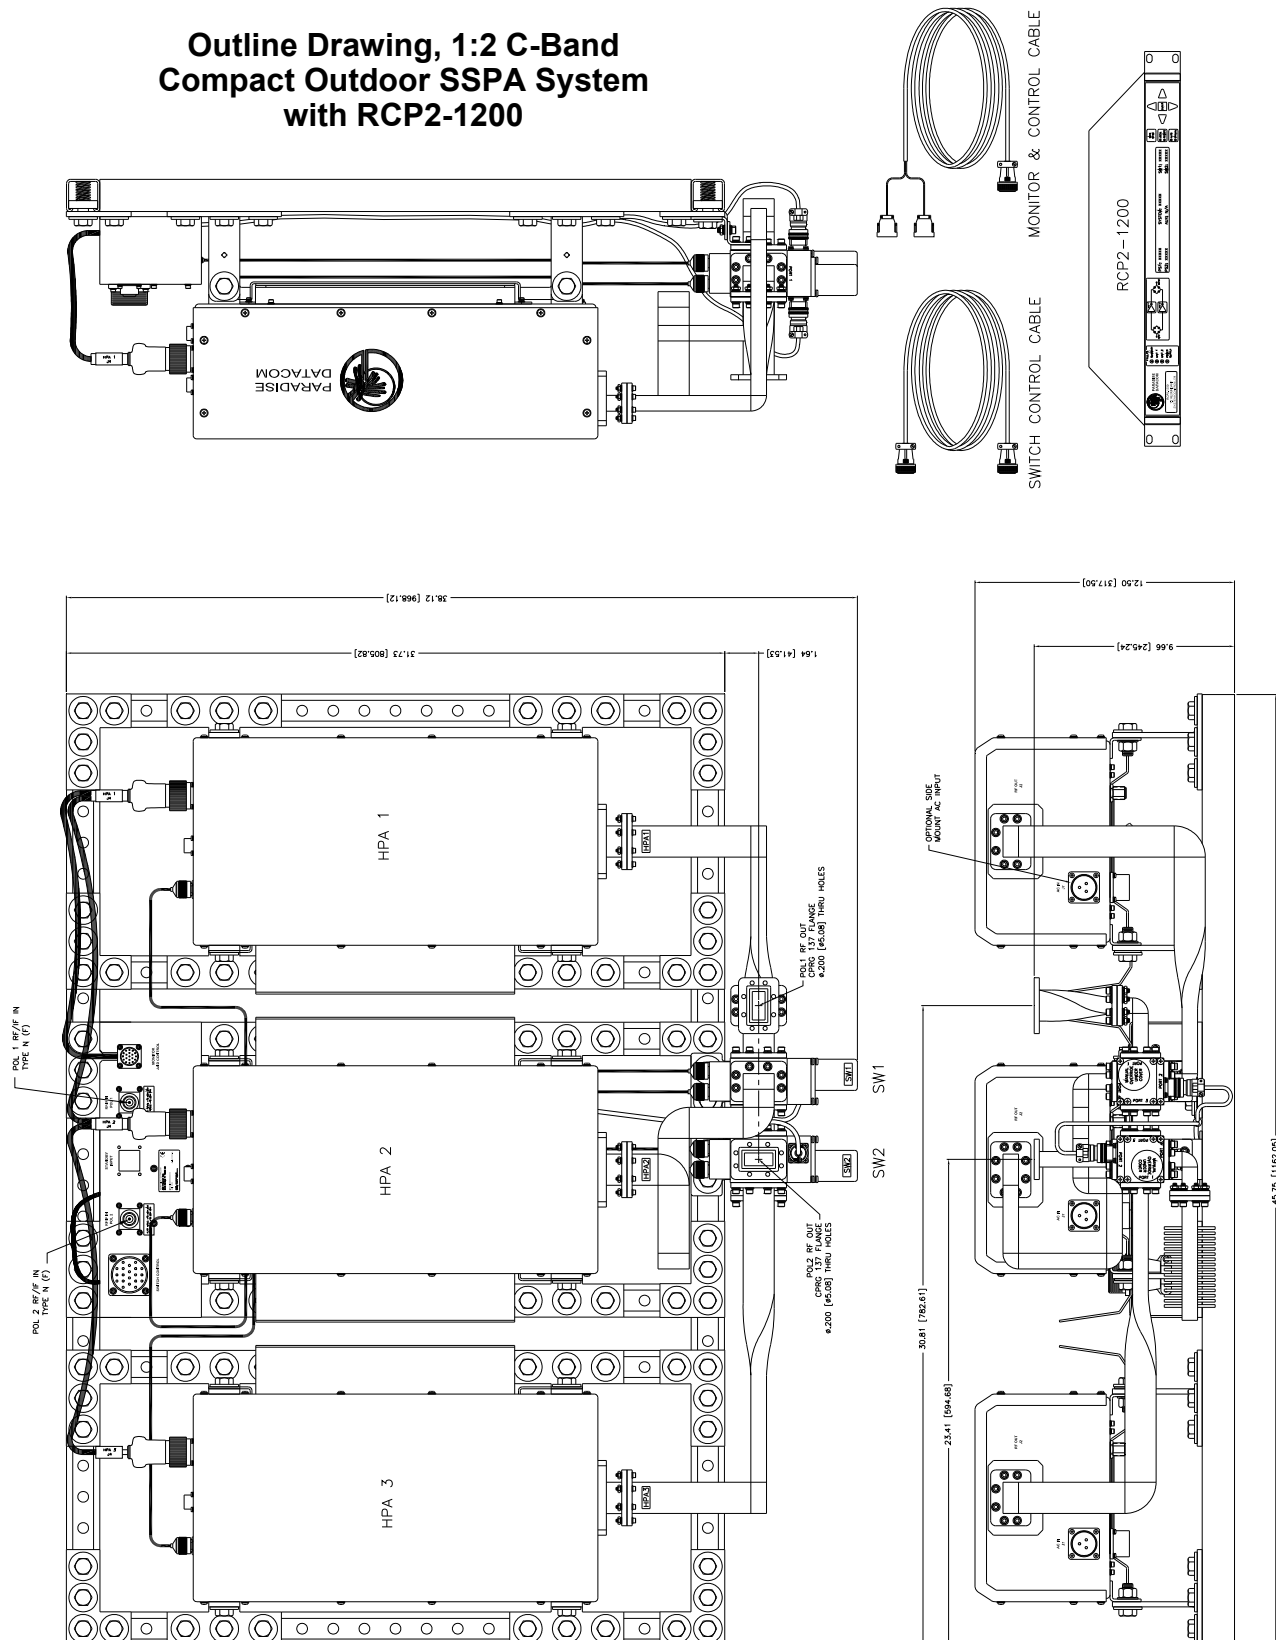

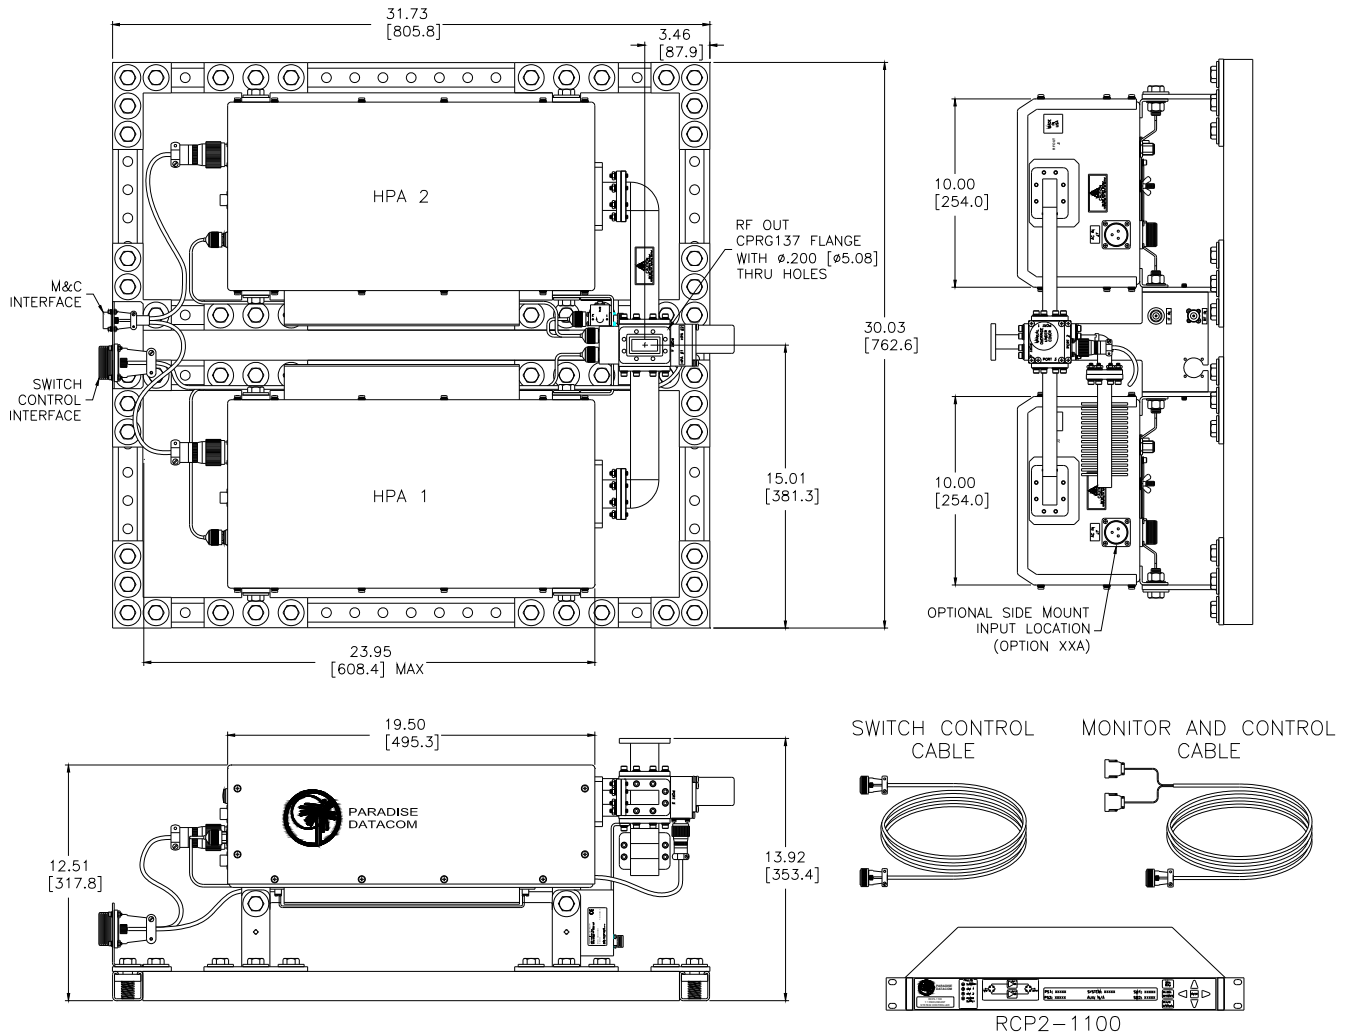

Outline Drawing, 1:1 C-Band Compact Outdoor SSPA System with RCP2-1100

Part Number Configuration Matrix, GaAs High Power Outdoor Systems

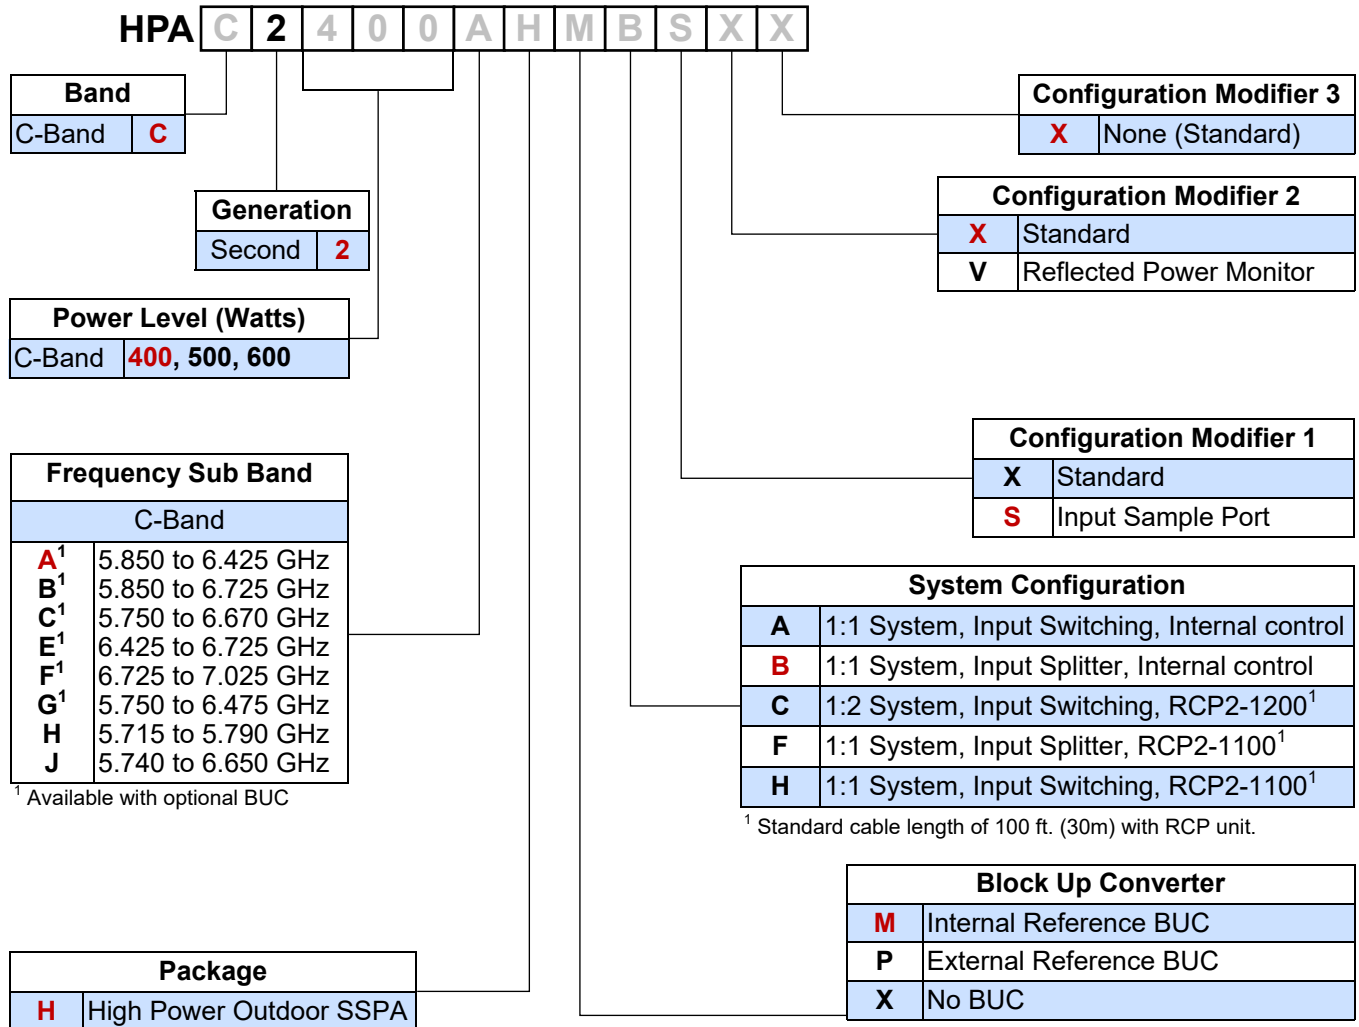

Example — A 1:1 Redundant System with Input Splitting and Internal Redundancy Control, using two (2) 400W GaAs C-Band High Power Outdoor SSPAs with optional input sample ports and optional internal reference block up converters is part number: **HPAC2400AHMBSXX**.

COMMENTS:



Part Number Configuration Matrix, GaN High Power Outdoor Systems

¹ Available with optional BUC

Example — A 800W GaN C-Band (5.85 to 6.425 GHz) 1:1 Redundant High Power Outdoor SSPA System with input splitting, an internal reference block up converter and internal redundancy control is model number:
HPAC2800AHMBXXXG.

COMMENTS:



HPA K 2 1 0 0 A C M B X X X

Part Number Configuration Matrix, GaN Compact Outdoor Systems

HPA														X	2	3	0	0	A	C	M	B	X	X	X	G
Band															GaN Device Designator											
L-Band	L														G	GaN Technology										
S-Band	S																									
C-Band	C																									
X-Band	X	Generation															Configuration Modifier 3									
Ku-Band	K	Second	2														X	None (Standard)								
																	A	Side-mount AC Input, Location 'A'								
Power Level (Watts)																	Configuration Modifier 2									
L-Band	100, 200, 300, 400, 500																X	Standard								
S-Band	100, 200, 300, 400, 500																M	MS-Connector Covers								
C-Band	300, 400, 500																R ¹	Receive Band Reject Filter								
X-Band	300, 400																Y ¹	M + R (see above)								
Ku-Band	200, 250																¹ S-Band and X-Band only									
Frequency Sub Band																	Configuration Modifier 1									
L-Band																	X	Standard								
A	1.75 to 1.85 GHz																K ¹	110 VAC Input Power								
S-Band																	¹ Available on all C-Band units, all X-Band units, Ku-Band units > 150W									
A	2.02 to 2.12 GHz																System Configuration									
B	2.20 to 2.30 GHz																A	1:1 System, Input Switching, Internal control								
G	1.75 to 2.12 GHz																B	1:1 System, Input Splitter, Internal control								
C-Band																	C	1:2 System, Input Switching, RCP2-1200 ¹								
A ¹	5.850 to 6.425 GHz																F	1:1 System, Input Splitter, RCP2-1100 ¹								
B ¹	5.850 to 6.725 GHz																H	1:1 System, Input Switching, RCP2-1100 ¹								
C ¹	5.750 to 6.670 GHz																¹ Standard cable length of 100 ft. (30m) with RCP unit.									
E ¹	6.425 to 6.725 GHz																Block Up Converter									
F ¹	6.725 to 7.025 GHz																M	Internal Reference BUC								
H ¹	5.715 to 5.790 GHz																P	External Reference BUC								
L ¹	4.400 to 5.000 GHz																X	No BUC								
X-Band																	See page 5 for BUC reference configuration options.									
A ¹	7.90 to 8.40 GHz																Option 1 is standard for all 1:1 and 1:2 systems using BUC option 'M' and for 1:1 systems with input splitting using BUC option 'P'.									
Ku-Band																	Option 3 is standard for all 1:2 systems and 1:1 systems with input switching using BUC option 'P'.									
A ¹	14.00 to 14.50 GHz																Package									
B ¹	13.75 to 14.50 GHz																C	Compact Outdoor SSPA								

Global Sales Offices

U.S., Canada, Latin America

Teledyne Paradise Datacom
11361 Sunrise Park Drive
Rancho Cordova, CA 95742
Tel: +1 (814) 954-6163
sales@paradisedata.com

Eastern Regional Sales Office

(Eastern U.S. & Latin America)
RF Inquiries: John O'Grady, (848) 220-6464
Modem Inquiries: Mike Towner, (470) 509-9941
sales@paradisedata.com

Western Regional Sales Office

(Western U.S. & Canada)
Bruce Grieser
Cell: +1 (480) 444-9676
sales@paradisedata.com

U.K. Office

Europe, Middle East, Africa
Teledyne Paradise Datacom
106 Waterhouse Lane,
Chelmsford, Essex, England, CM1 2QU
Tel: +44(0)1245 847520
Tel: +44(0)1376 515636
sales@paradisedata.com

Asia Pacific

Tavechai Mektavepong
Teledyne Paradise Datacom Thailand Office
333, 20 C1 Fl., Lao Peng Nguan Tower 1,
Vibhavadi-Rangsit Rd.,
Chomphol, Chatuchak,
Bangkok 10900
Thailand

Tel: +66 2-272-2996
Fax: +66 2-272-2997
sales@paradisedata.com

Beijing, China

Teledyne Paradise Datacom Representative Office
Room 204, No.1 Building,
No.9 Jiuxianqiao East Road,
Chaoyang District,
Beijing, China 100016

Tel: +86 13601251528
sales@paradisedata.com

Use and Disclosure of Data: This product is classified as EAR99 and is subject to U.S. Department of Commerce regulations. Export, reexport or diversion contrary to U.S. law is prohibited.

Proprietary and Confidential: The information contained in this document is the sole property of Teledyne Paradise Datacom. Any reproduction in part or as a whole without the written permission of Teledyne Paradise Datacom is prohibited.

Data Security: Teledyne Paradise Datacom amplifiers and controllers do not inherently provide encryption to transmitted data, and have limited security measures to protect it. If the unit will be accessible over the Internet, exercise appropriate data security protocols. Teledyne Paradise Datacom strongly recommends placing the equipment behind a protective Firewall or setting up a VPN link with dual authentication for remote access.

Specifications are subject to change without notice.