

Power Divider, 4-way, 2-18GHz, SMA Female

WM4PD-2-18-S

Description

WM4PD-2-18-S is a wideband 4-way in-line power splitter covering the continuous bandwidth of 2 to 18 GHz in an aluminum enclosure measuring 4.00 x 2.50 x 0.38 inches. This covers several of the octave letter bands used by the military including S, C, X and Ku bands. The device is RoHS compliant, however lead solder is available on special order for high reliability military applications. Excellent VSWR and insertion loss, and 0.3dB typical amplitude balance across the band. Connectors are stainless steel for durability. Our own unique design maximizes bandwidth in a small size. Assembled and tested in USA. In continual production since 2015.



Photo is representative.

Specifications	Min.	Typ.	Max.	Units
Frequency	2	-	18	GHz
Impedance	-	50	-	Ohm
Return Loss (Port S)	11	13	-	dB
Return Loss (Port 1-4)	14	17	-	dB
Insertion Loss (above theoretical 6.02 dB)	-	0.8	1.8	dB
Isolation	16	18	-	dB
Amplitude Balance	-	0.3	1.0	dB
Phase Balance	-	3	12	Degrees
Input Power (CW) ¹	-	-	30	Watts

Mechanical



Connector Interface	SMA-Female
Operating Temperature ²	-55 to +85 °C
Storage Temperature	-55 to +100 °C
Weight Estimate	11 oz (312 g)
Humidity	10-90% non-condensing
Environment	Indoors Use Only
CAGE Code	78YZ0



Materials

RoHS Compliant ³	Yes
REACH Compliant ³	Yes
Enclosure	Aluminum
Connectors	Stainless Steel
Contacts	Be Cu, Gold Plated
Insulators	PTFE
Finish	Green Paint



1. All output ports should be terminated in a 50-ohm load with 1.2:1 max VSWR.
2. Electrical specifications at +25 °C only.
3. To the best of our knowledge at the time of publication.



Typical Performance at +25 °C

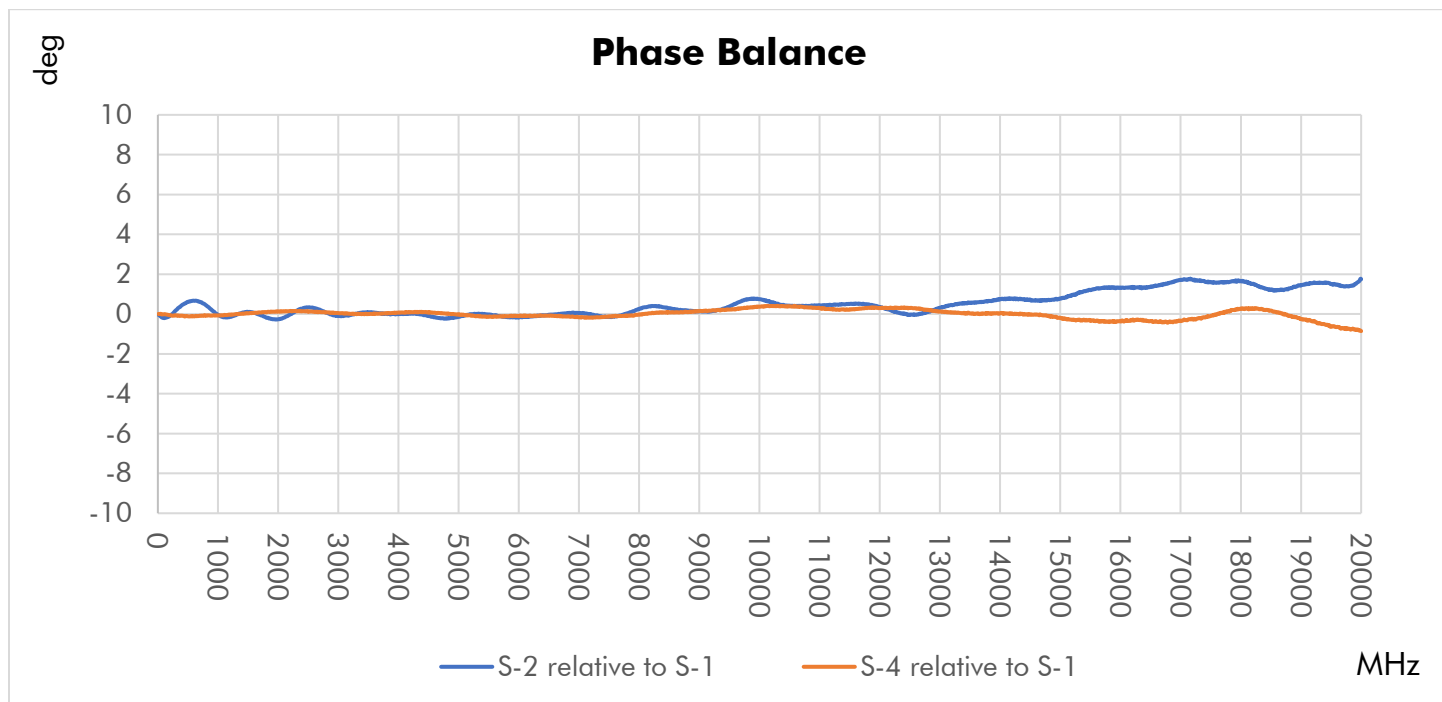
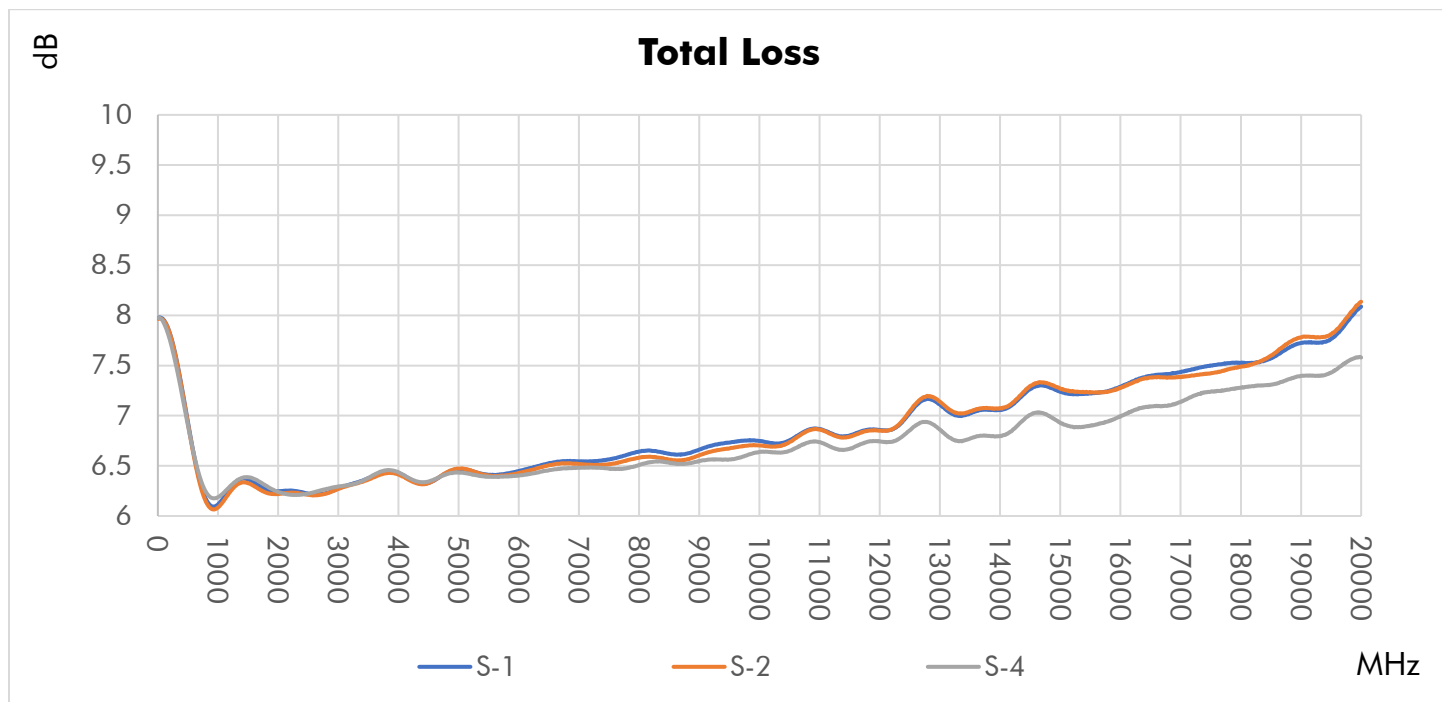


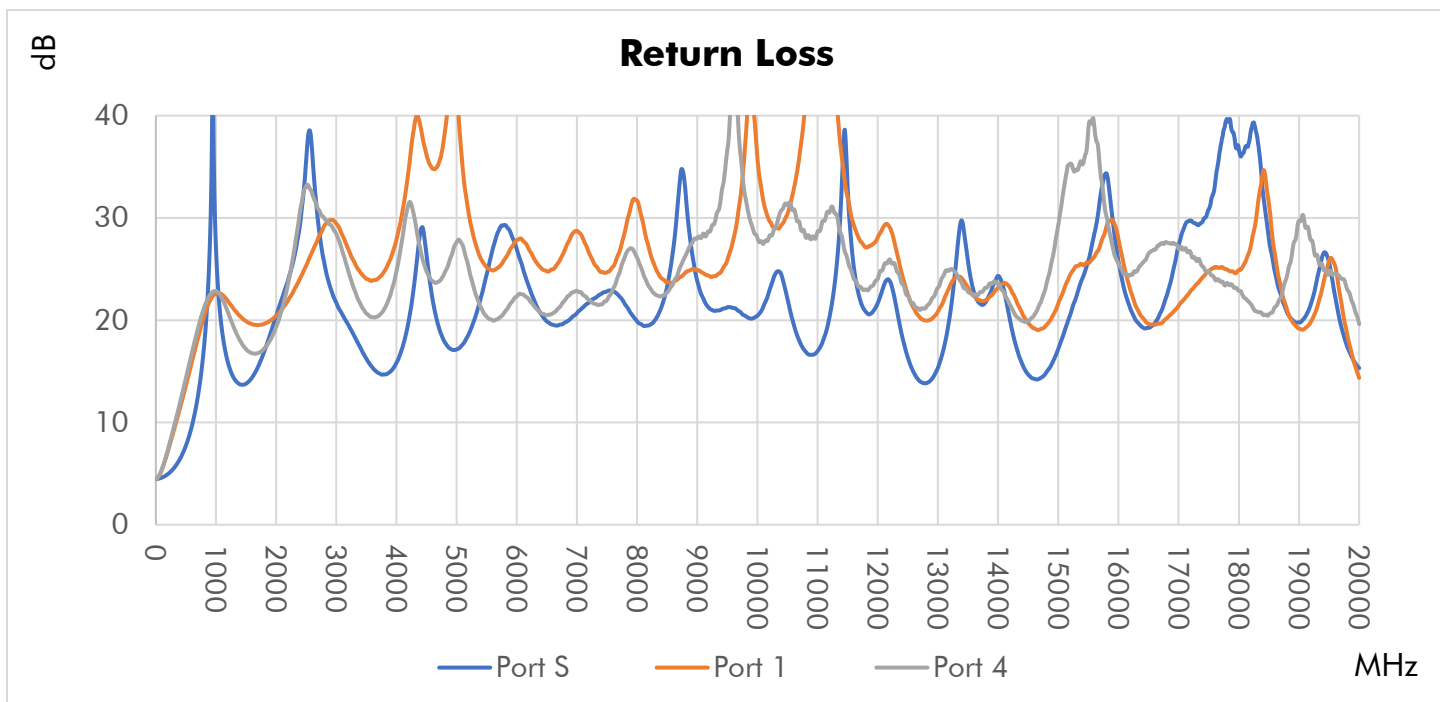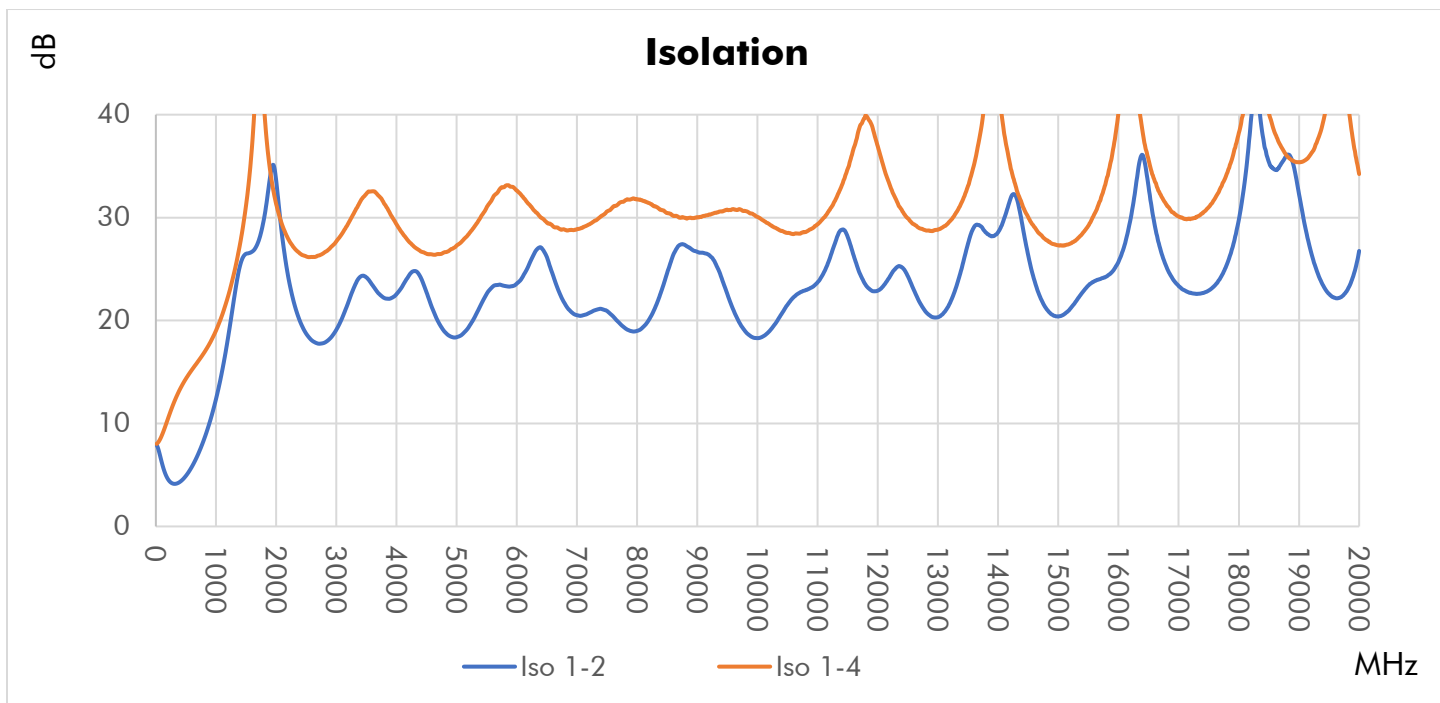

Typical Performance Over Temperature

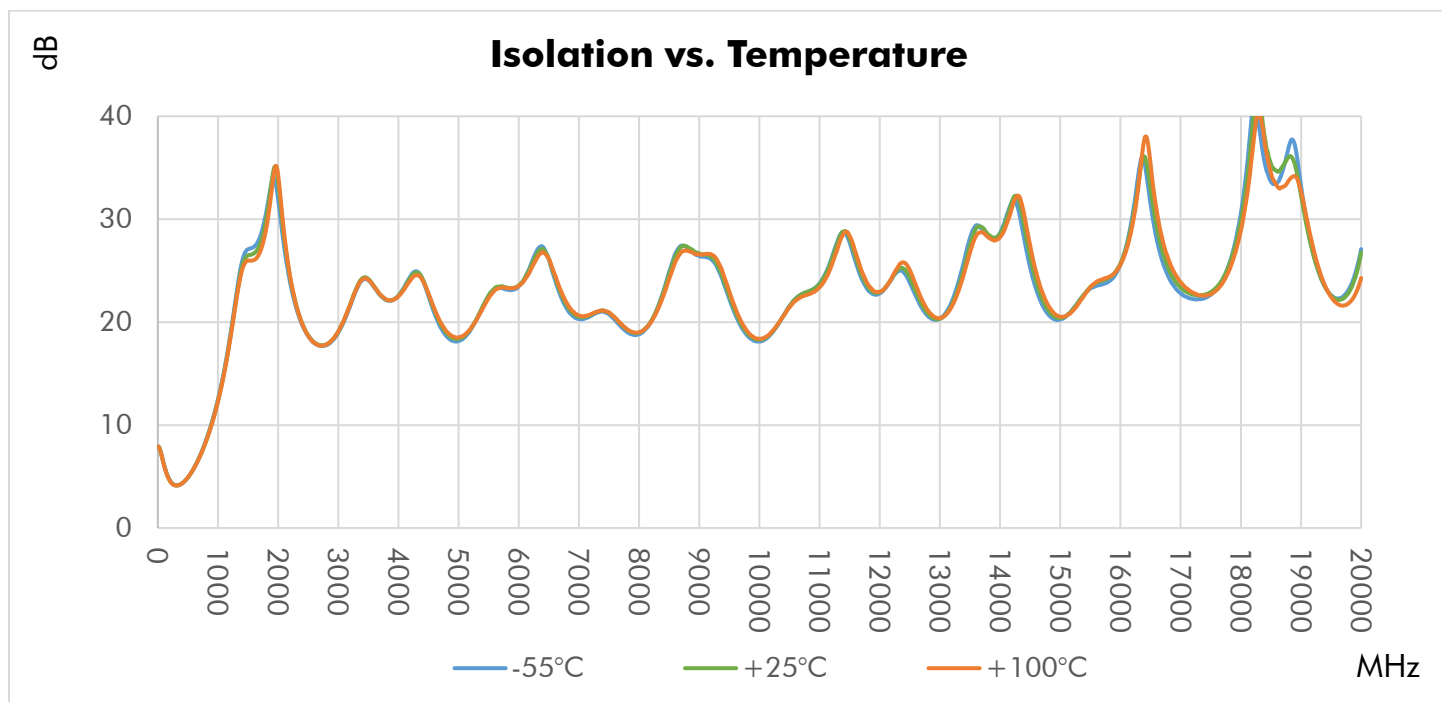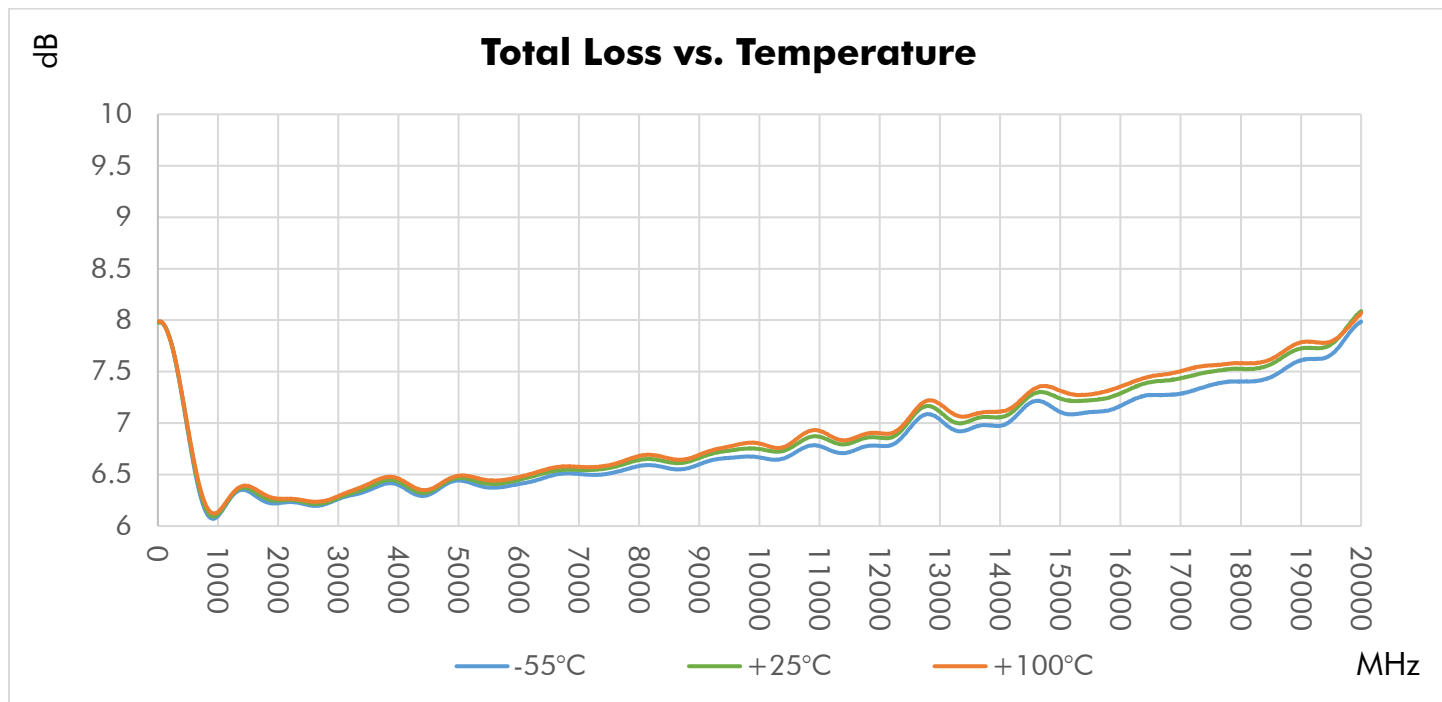

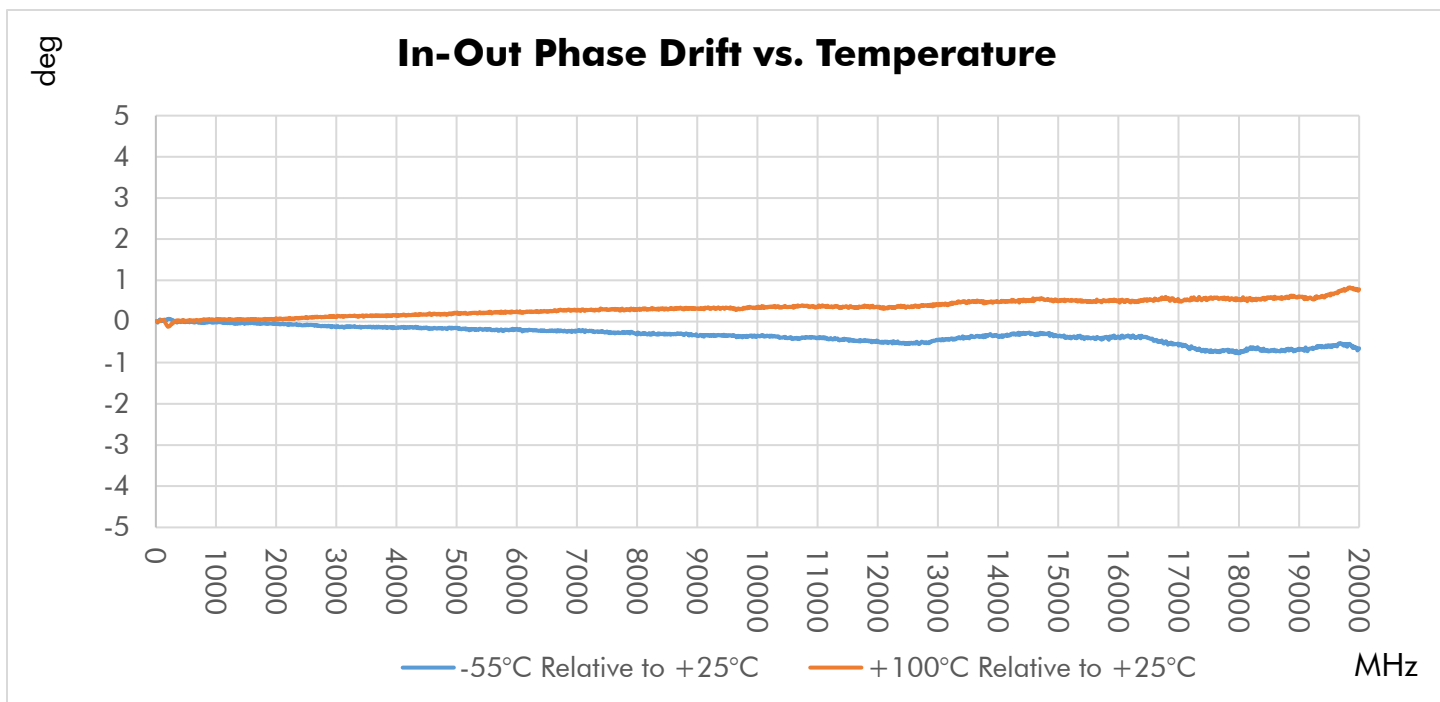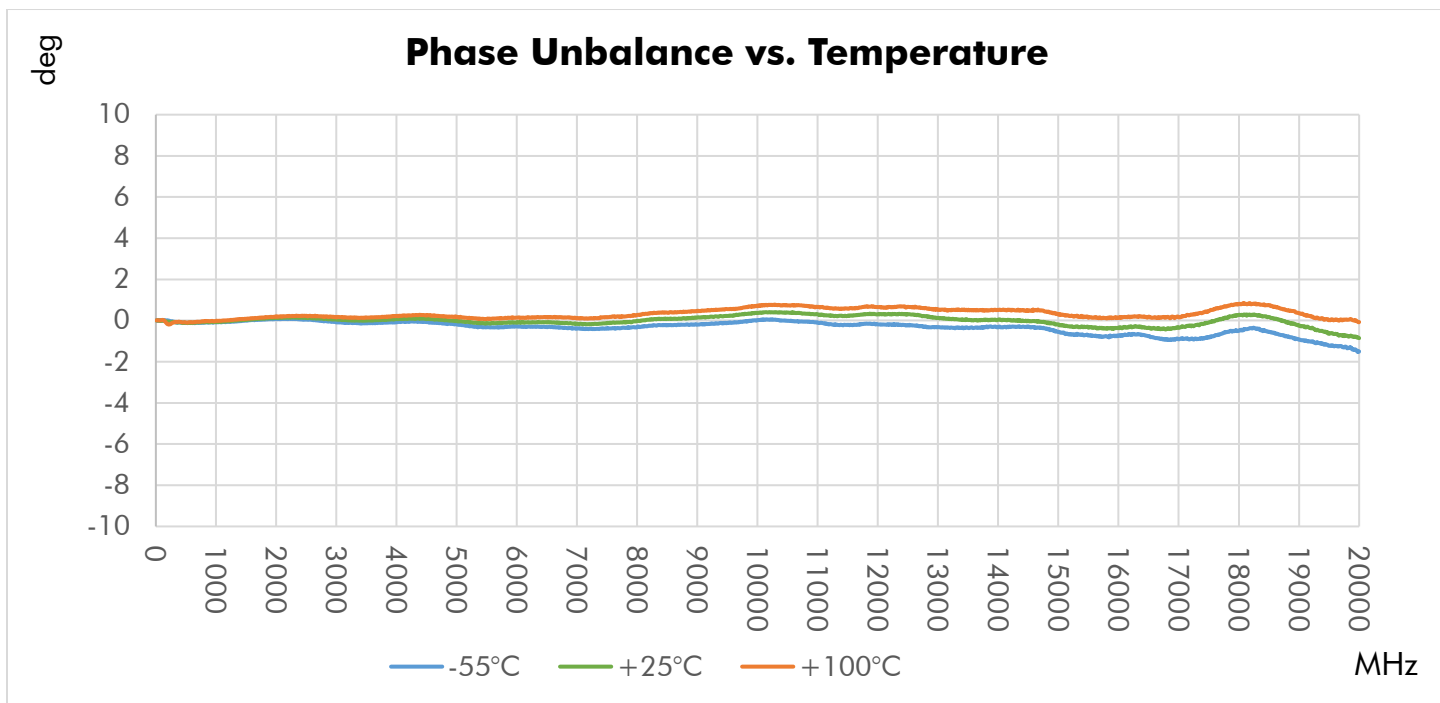


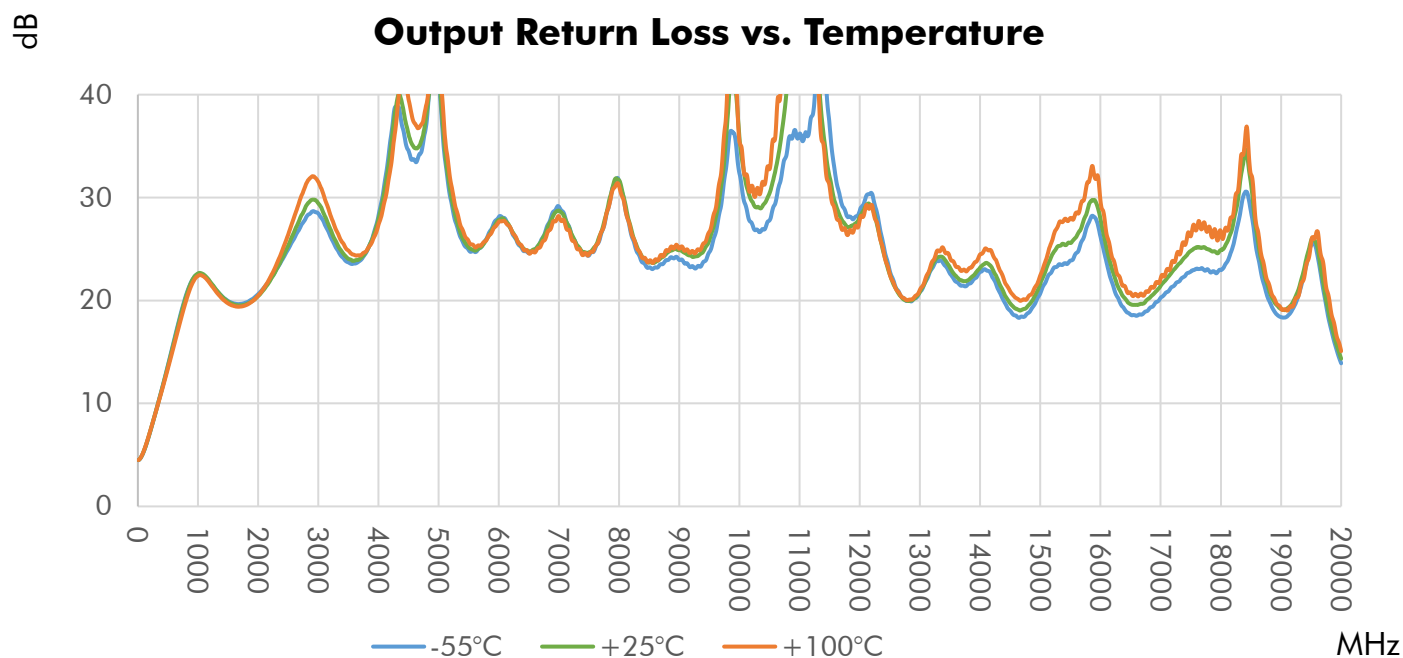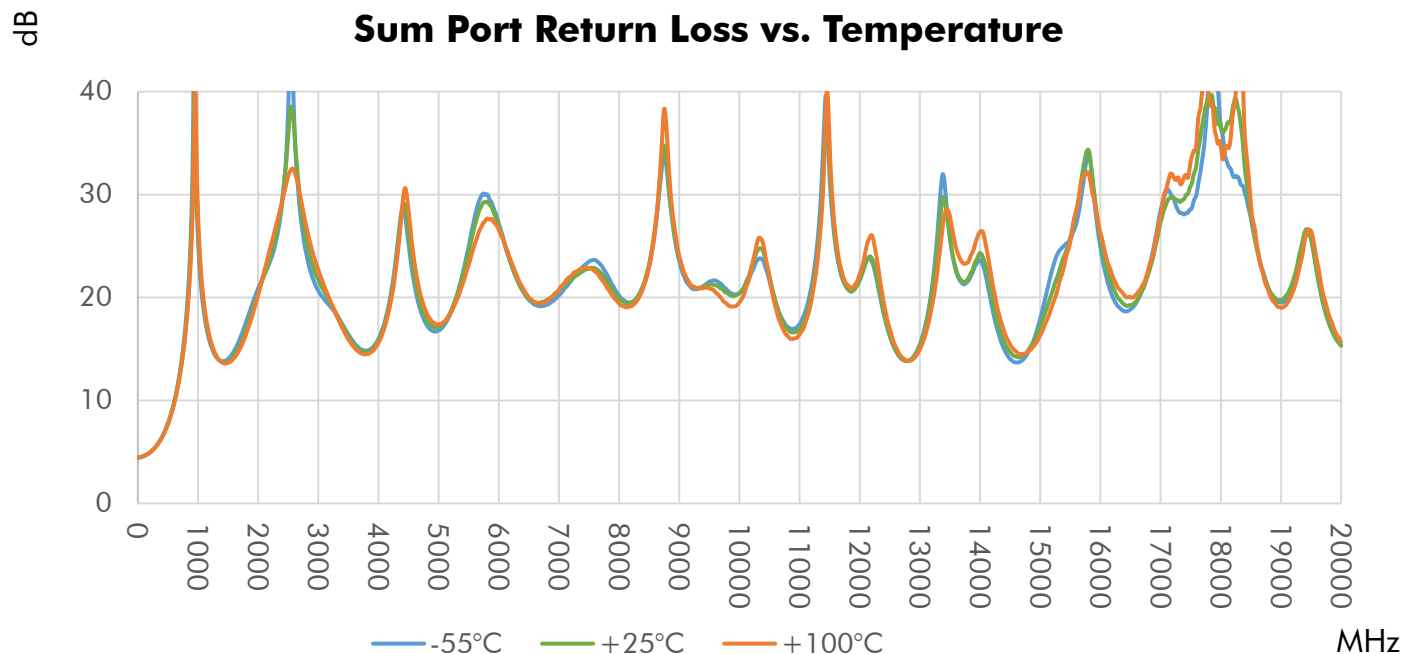

Typical Performance Data

Frequency (MHz)	Return Loss (dB)			Total Loss (dB)		Isolation (dB)
	Port S	Port 1	Port 4	S-1	S-4	
2000	18.0	20.1	18.1	6.3	6.3	32.8
2500	30.2	30.5	30.1	6.2	6.2	20.1
3000	24.4	32.8	24.5	6.2	6.2	19.1
3500	15.2	22.2	15.2	6.3	6.3	23.0
4000	17.5	28.5	17.5	6.3	6.2	22.4
4500	24.1	30.3	24.1	6.3	6.3	26.0
5000	20.9	33.4	21.0	6.3	6.4	21.4
5500	19.3	24.2	19.2	6.3	6.3	22.2
6000	21.2	29.6	21.2	6.4	6.4	20.1
6500	23.4	27.0	23.4	6.3	6.4	25.3
7000	28.9	25.6	29.0	6.5	6.5	29.1
7500	23.5	26.7	23.5	6.4	6.4	23.4
8000	20.7	37.2	20.8	6.4	6.4	19.8
8500	22.2	35.7	22.3	6.4	6.5	22.9
9000	14.9	40.6	14.8	6.6	6.7	22.2
9500	31.0	32.0	30.9	6.6	6.5	27.1
10000	24.1	52.7	24.2	6.5	6.6	25.0
10500	17.5	22.6	17.5	6.8	6.8	26.3
11000	14.7	22.5	14.8	6.5	6.5	20.8
11500	39.6	23.7	39.8	6.6	6.6	20.2
12000	23.3	31.3	23.4	6.7	6.7	23.7
12500	31.0	22.4	31.1	6.6	6.6	32.2
13000	22.2	21.7	22.3	6.9	6.9	24.3
13500	29.3	24.4	29.6	6.6	6.6	23.4
14000	17.5	22.2	17.5	6.8	6.9	26.1
14500	21.4	27.6	21.4	6.7	6.8	25.2
15000	33.4	36.0	33.6	6.7	6.8	24.1
15500	24.7	26.1	24.8	6.7	6.8	30.2
16000	17.5	25.5	17.5	6.8	6.9	29.8
16500	14.8	22.2	14.8	7.1	7.2	20.6
17000	24.0	21.1	24.2	6.8	6.9	24.5
17500	22.0	23.6	22.0	6.8	6.9	26.6
18000	14.6	16.6	14.6	7.1	7.2	32.8
18500	23.6	18.7	23.5	6.8	6.9	25.0
19000	16.0	16.4	16.1	7.0	7.1	35.9
19500	20.0	15.9	20.1	7.1	7.2	33.0
20000	13.3	16.5	13.3	7.2	7.3	27.1

Outline Dimensions

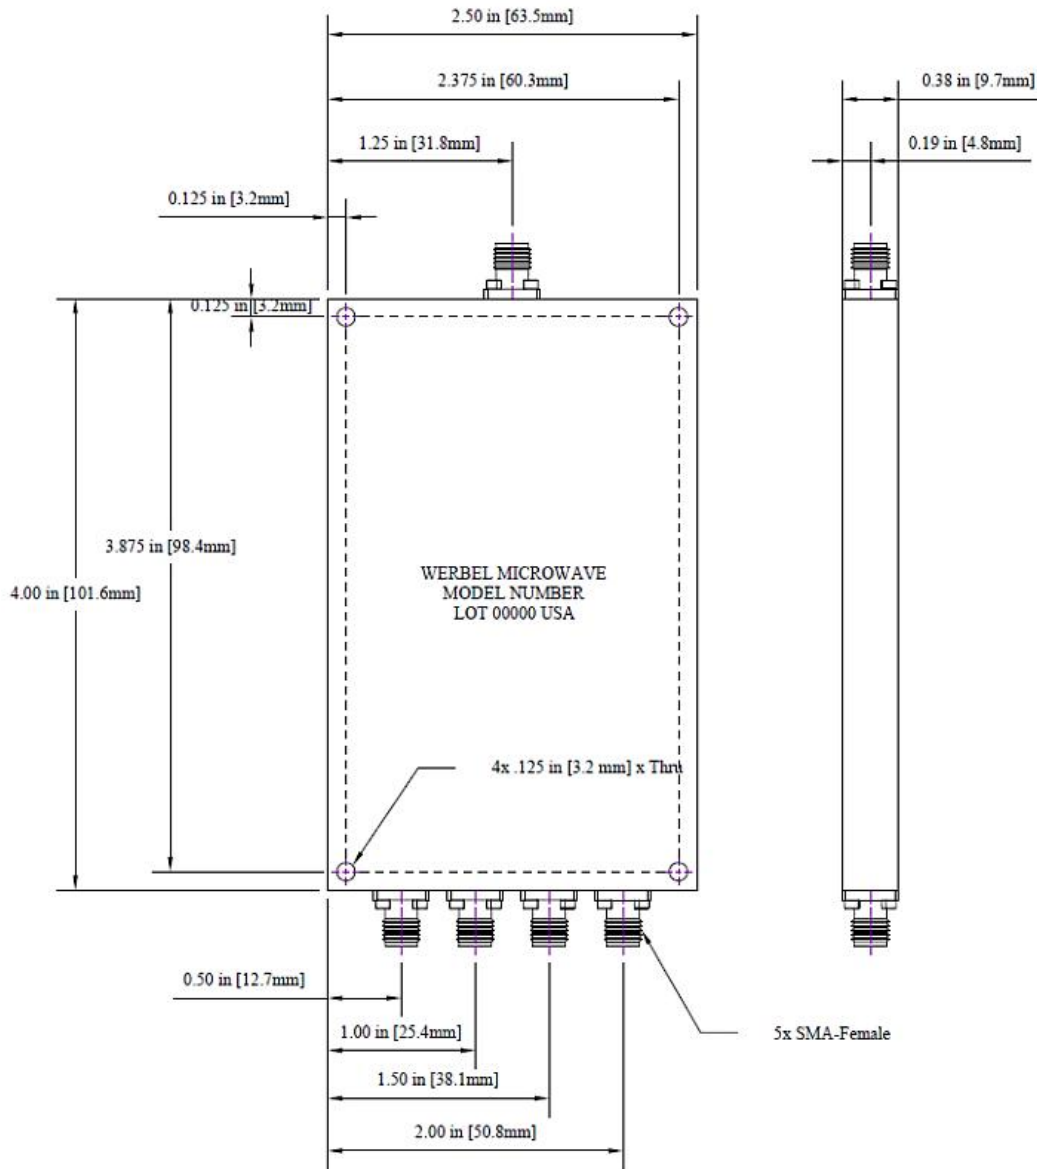

Outline drawing: OL-4182

Dimensions are in inches, [mm] shown for convenience.

Tolerances on 2-pl decimals: ± 0.03 . 3-pl decimals: ± 0.015 .

The information contained in this document is accurate to the best of our knowledge and representative of the product described herein at the date of publication. It may be necessary to make modifications to the product and/or documentation of the product. Werbel Microwave LLC reserves the right to make such changes as required without notice. Unless otherwise stated, all specifications and dimensions are nominal. Werbel Microwave LLC does not make any representation or warranty regarding the suitability of the product described herein for any particular purpose or application, and Werbel Microwave LLC does not assume any liability arising out of the use of any part of documentation. This document gives only a description of the product(s) and shall not form part of any contract. Please contact a Werbel Microwave LLC Applications Engineer for the most current specification drawing.

Reliability testing was performed as an internal requalification of the product to substantiate the published specifications, which were previously arrived at by calculation and/or similarity to existing products. The results of these tests are provided as a courtesy and shall not form part of a contract or warranty. While reliability tests may depict the product being tested beyond the published specification ratings for the purpose of stress testing the product, this does not imply that the product should be operating above the rated limits for any length of time. Specifications related to reliability (e.g., performance over temperature, power handling, DC current, HI-POT) are "designed to meet" and are not individually tested in production of commercially available products. Please contact a Werbel Microwave LLC Applications Engineer if specific reliability testing is needed on a particular product.