



80W Ext. Ku-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 13.75-14.50 GHz
- ◆ Double- L.O. (switchable 12.80 & 13.05 GHz)
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (447W typ.)
- ◆ Auto-ranging powering option 80 - 240 VAC
- ◆ Extreme P-Out GaN linearity
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal auto-sensing and controllable 10MHz high stability reference
- ◆ Built-in redundancy option
- ◆ M&C - combined RS-232/485 and optional FSK, Ethernet control (HTTP and SNMP ver. 3)
- ◆ RoHS compliant

ABD80KX / ABD80KXF



This smallest and lightest 80W L-To Ku-Band Block Up Converter is based on GaN technology. Incomparable low power consumption, double L.O., field-exchangeable connector, auto-sensing and controllable internal 10 MHz reference make this unit universal for any Ku-Band application. M&C (FSK) capability enables troubleshooting, monitoring and controlling the BUC.

Mechanical Drawing

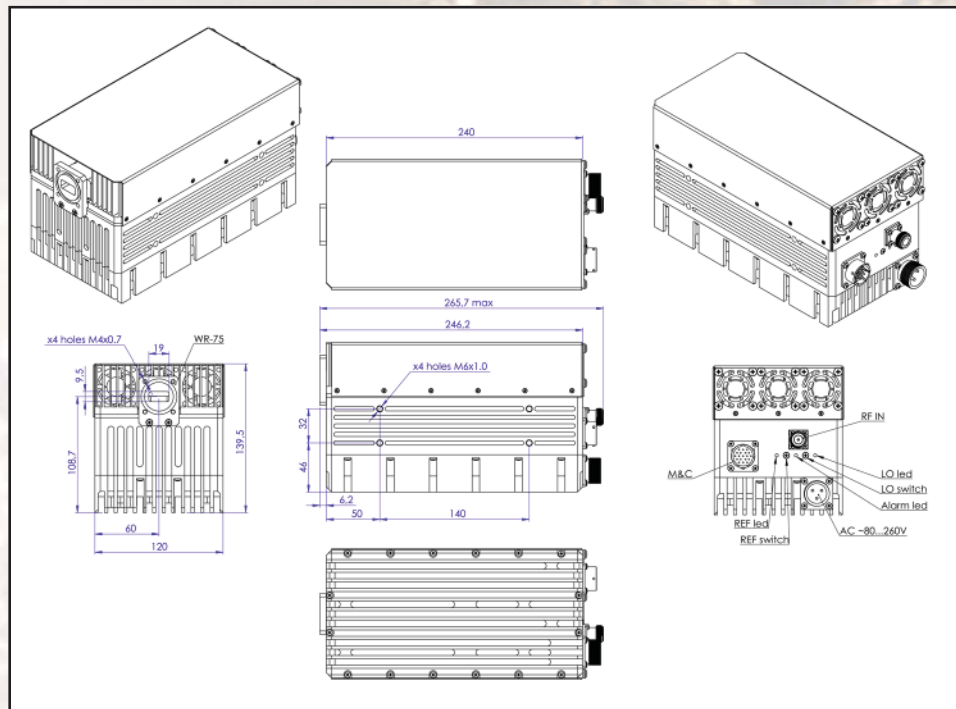



80W Ext. Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS		
RF frequency		14.00 to 14.50 GHz 13.75 to 14.50 GHz
Dual local oscillator		13.05 GHz and 12.80 GHz
IF frequency		950 to 1,700 MHz
Output power		80W (+49 dBm min.) 42.3W (+46.2 dBm min.) P-Linear
IF connector		N-type or F-type (field-exchangeable)
Power supply auto-ranging		80 ~ 240 VAC via MS connector, 447W typ.
Output interface		WR-75 G
Gain		68 dB min., 70 dB nominal
IMD3 (two tones)		-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage		-45 dBm max
Spurious		-50 dBc max
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference: frequency input power		via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40 MHz ± 1.8 dB over full band ± 1.5 dB typ., ± 1.8 dB max.
TX Gain stability over temperature range		
Phase noise (Exceeds Intelsat's standard IESS308/309)		-55 dBc/Hz max. @ 10 Hz -65 dBc/Hz max. @ 100 Hz -75 dBc/Hz max. @ 1 KHz -85 dBc/Hz max. @ 10 KHz -95 dBc/Hz max @ 100 KHz -115 dBc/Hz max @ 1 MHz
Noise power density	Transmit Receive	-80 dBm/Hz (max) -125 dBm/Hz (max)
Noise figure		15 dB max
Input V.S.W.R.		1.5 : 1 max
Output V.S.W.R.		1.5 : 1 max.
M&C		RS-232 and RS-485, Ethernet (HTTP and SNMP ver.3)
Mute		Shut off the HPA if L.O. unlocked
Status LED Amplifier L.O. 10MHz	RED GREEN GREEN GREEN blinking GREEN GREEN blinking RED	Summary alarm All OK All OK standard L.O. 13.05 GHz All OK extended L.O. 12.80 GHz External 10MHz reference Internal 10MHz reference No 10MHz reference detected
Humidity		100%
Temperature range (ambient) operating storage		-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock		Complies with MIL-STD-810E
Dimensions & housing		246.2 (L) x 120 (W) x 139.5 (H) mm 9.84" (L) x 4.72" (W) x 5.5" (H)
Weight		7.53 kg (16.0 lbs) max